


齿形

3.57 mm

20 微米

LFL

RFL

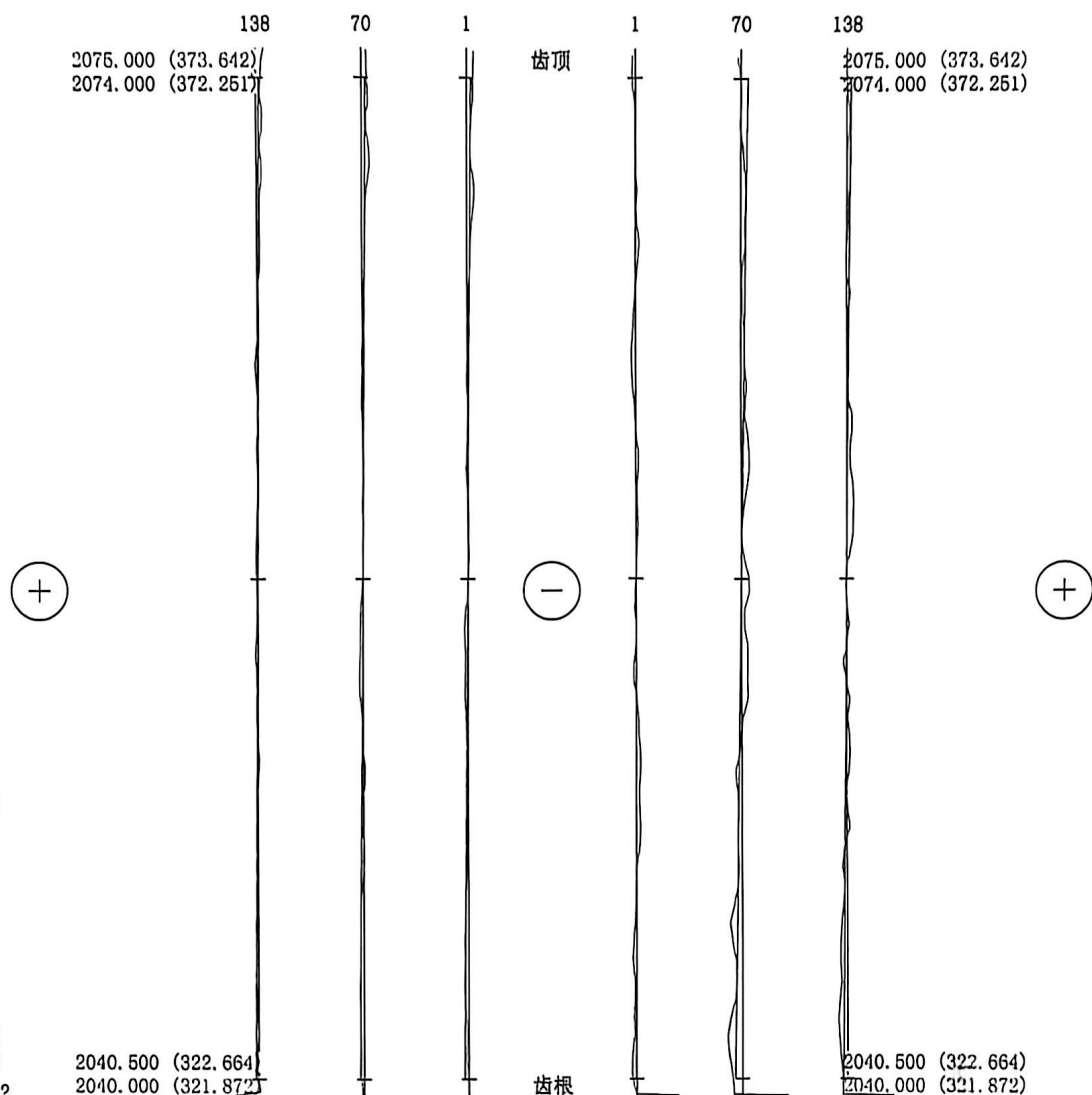

DM = 2.000
bM = 37.500

QCL-标准 = 3
QCL-实际 = 4

BTL-最大 = 692.86
BTL-最小 = 692.86
实际的BTL值 = 692.842

额定测量值	平均值	实际测量值	QCL-实际	实际测量值	平均值
FA = 6.0		2.4 3.4	3.3 2 4	2.6 6.4 4.7	
fha = 3.5	-2.1	-1.5 -2.3	-2.4 2 4	0.4 4.0 2.5	2.3
ffa = 5.0		1.7 1.7	1.4 1 2	2.6 3.0 2.6	
Ch = 0.0	1.0	1.0 1.0	0.9 0.8	3.2 2.0	2.0

SW-code: V7.75 P1 L1 Ta0 Tm0 Ex0 HQ0 PP63 PL75 PF_617 TRQ

z = 206.000	alpha = 20.000 °	d = 2060.000 mm	da = 2079.000 mm	dna = 2075.000 mm	L_Na = 373.642 mm
mn = 10.000	beta = 0.000 °	db = 1935.767 mm	df = 2035.500 mm	dnf = 2040.000 mm	L_Nf = 321.872 mm
	beta_e = 0.000 °	b = 75.000 mm	dfs = 2035.500 mm		

项目名称 : Z206M10
图号 :
序号 : 3
备注 : 1. RAD
顺序+位置 : IBN

NILES 齿轮测量系统
分析: DIN 3960
齿的类型 渐开线
日期 : 20. Dec. 2025 20:10:03
检查 :


KAPP NILES



扫描全能王 创建