BEARING SECTION

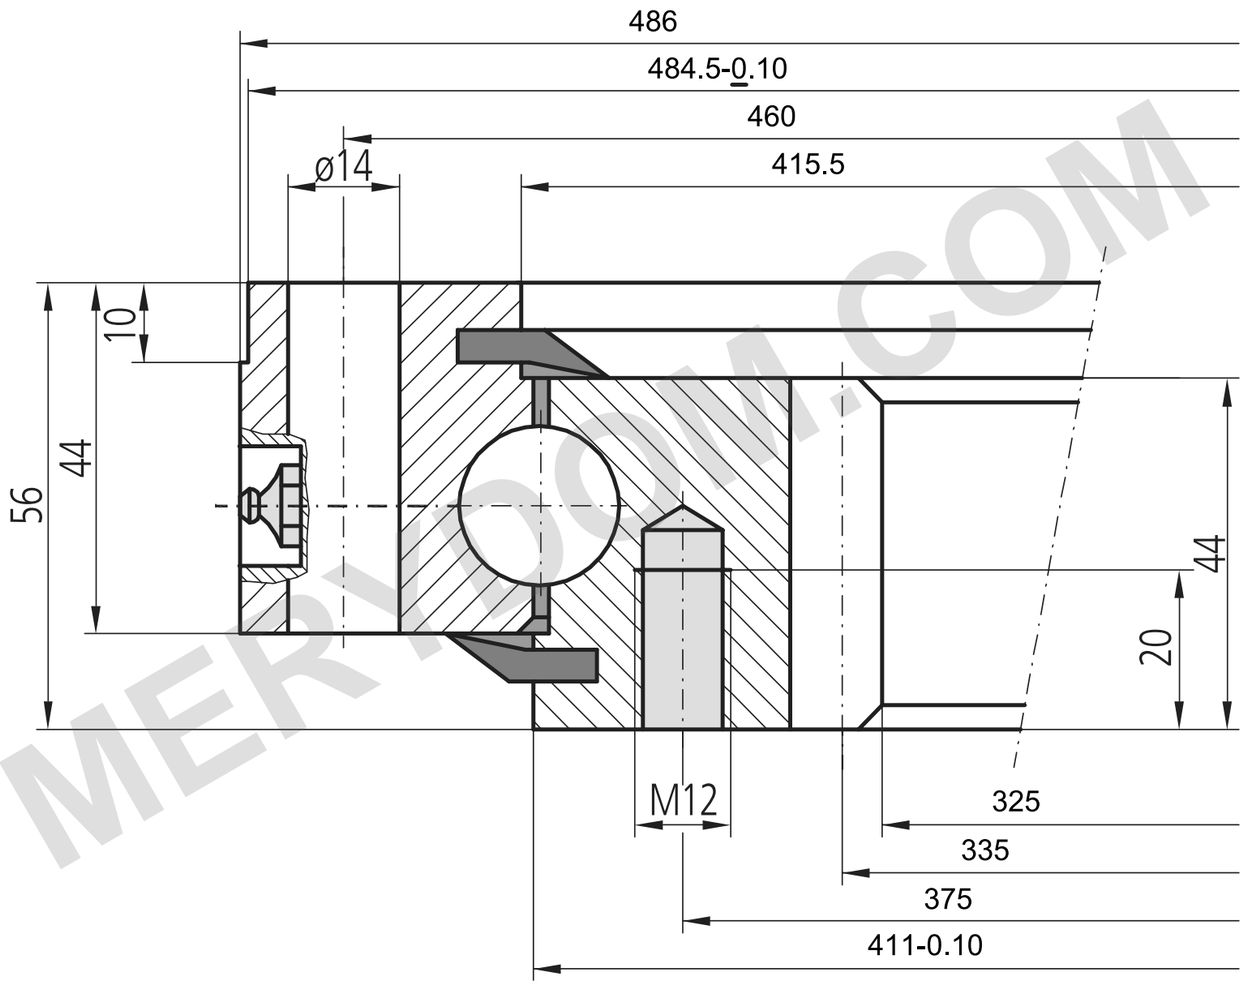

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

12-20 0411/1-02213

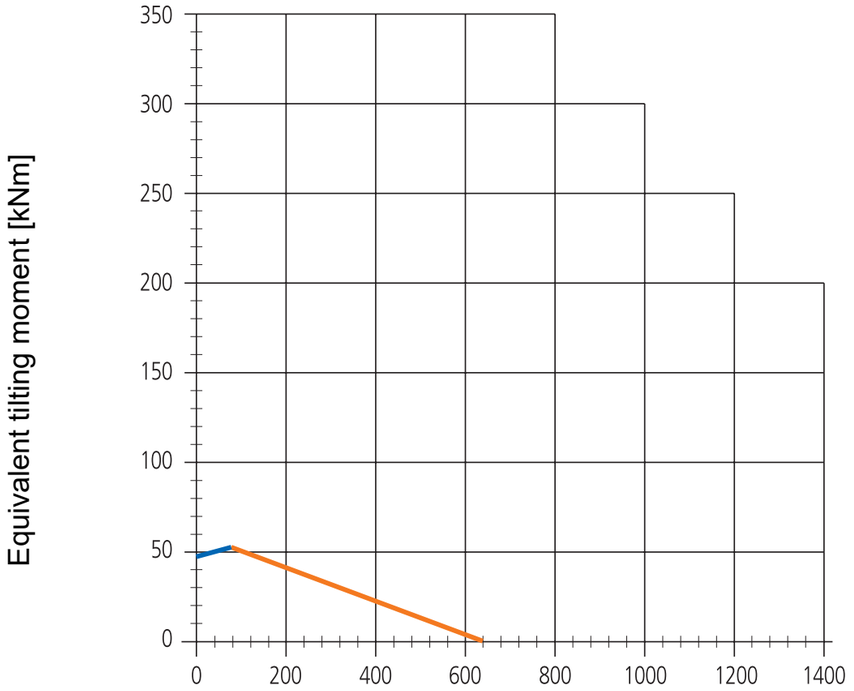

Equivalent axial load [kN]

Bolt curve Rp0.2 · Bolt grade 10.9

Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

Original catalogue dimensions and section details retained.

Outer ring: 24 × Ø14 · La Ø460

Inner ring: 24 × M12 · Li Ø375

Reference: IMO · PDF 10

OD Ø486 · ID Ø325 · H 56 · La Ø460 · Li Ø375 mm

IMO 12-20 0411/1-02213 — CAD Drawing (PDF) | MERYDOM

MERYDOM
Single-row four-point contact ball
12-20 0411/1-02213
Reference: IMO / 12-20
mm · NTS · REV 1.0 · Sheet 1/1

MERYDOM.COM