



BEARING SECTION

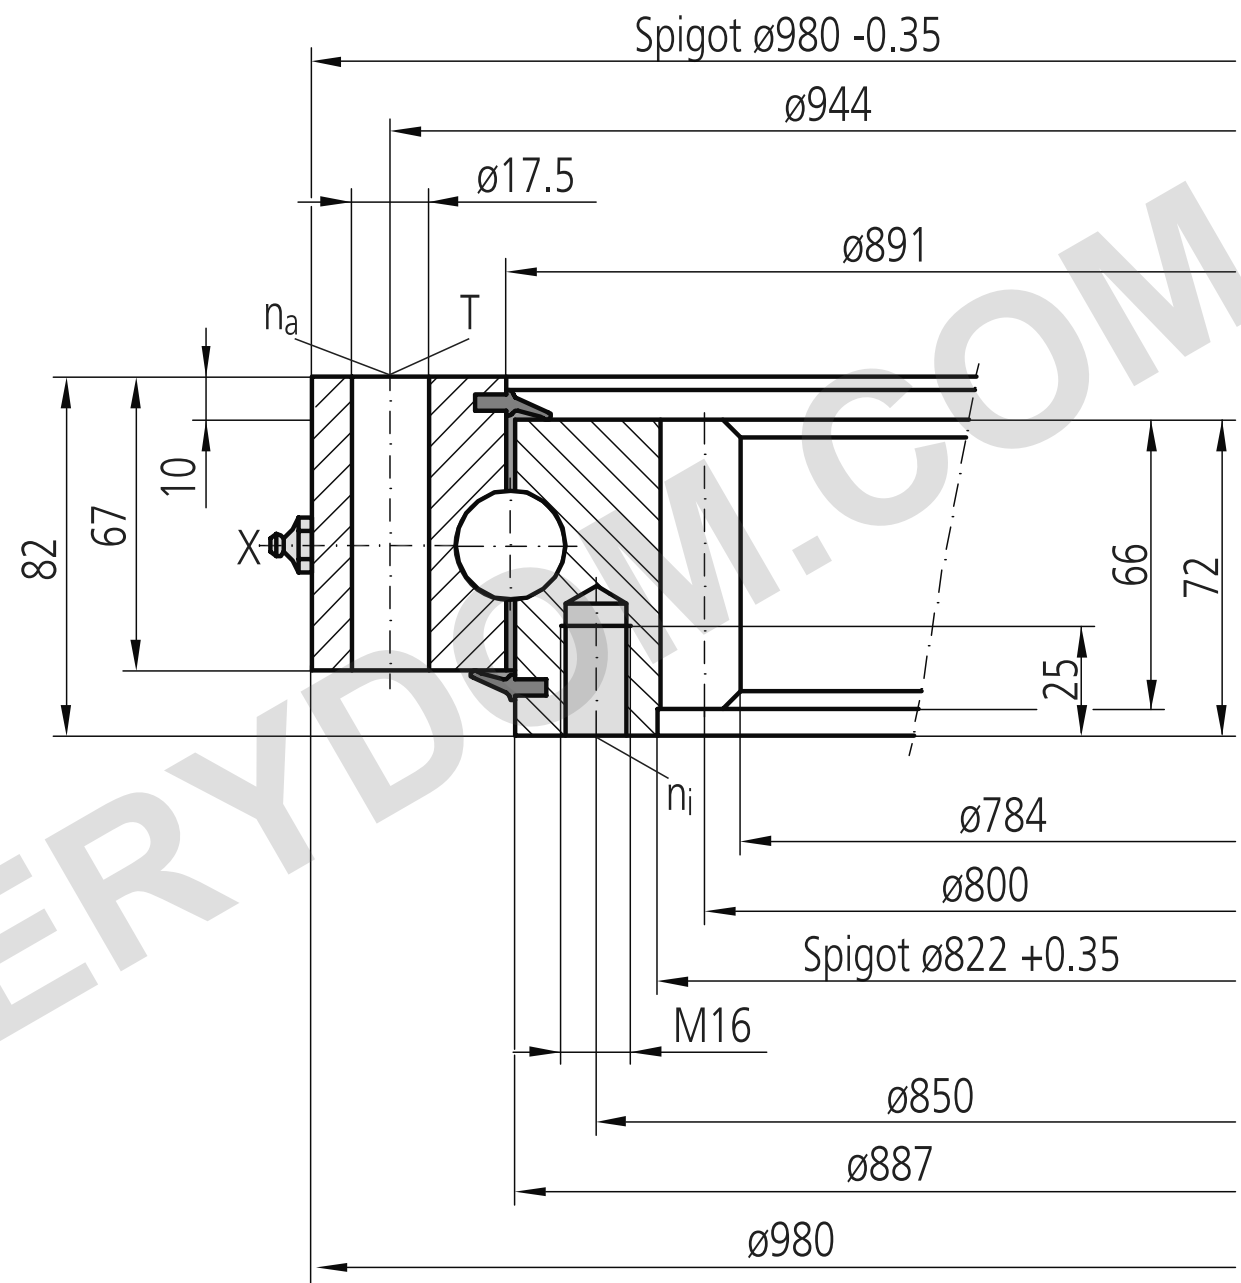

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

12-25 0889/2-04951

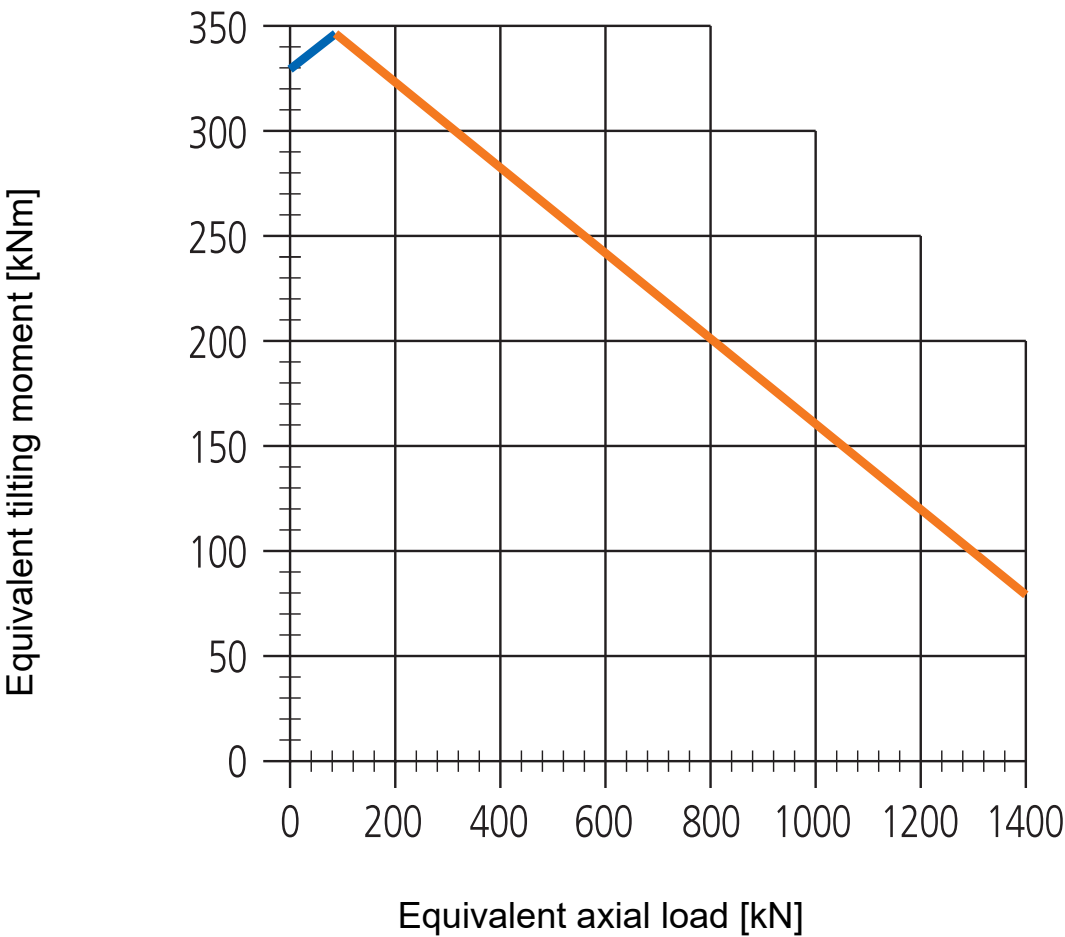

- Bolt curve Rp0.2 · Bolt grade 10.9
- Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
Original catalogue dimensions and section details retained.
Outer ring: 36 × $\varnothing 17.5$ · La $\varnothing 944$
Inner ring: 36 × M16 · Li $\varnothing 850$
Reference: IMO · PDF 28
OD $\varnothing 980$ · ID $\varnothing 784$ · H 82 · La $\varnothing 944$ · Li $\varnothing 850$ mm
IMO 12-25 0889/2-04951 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Single-row four-point contact ball

12-25 0889/2-04951

Reference: IMO / 12-25

mm · NTS · REV 1.0 · Sheet 1/1