



BEARING SECTION

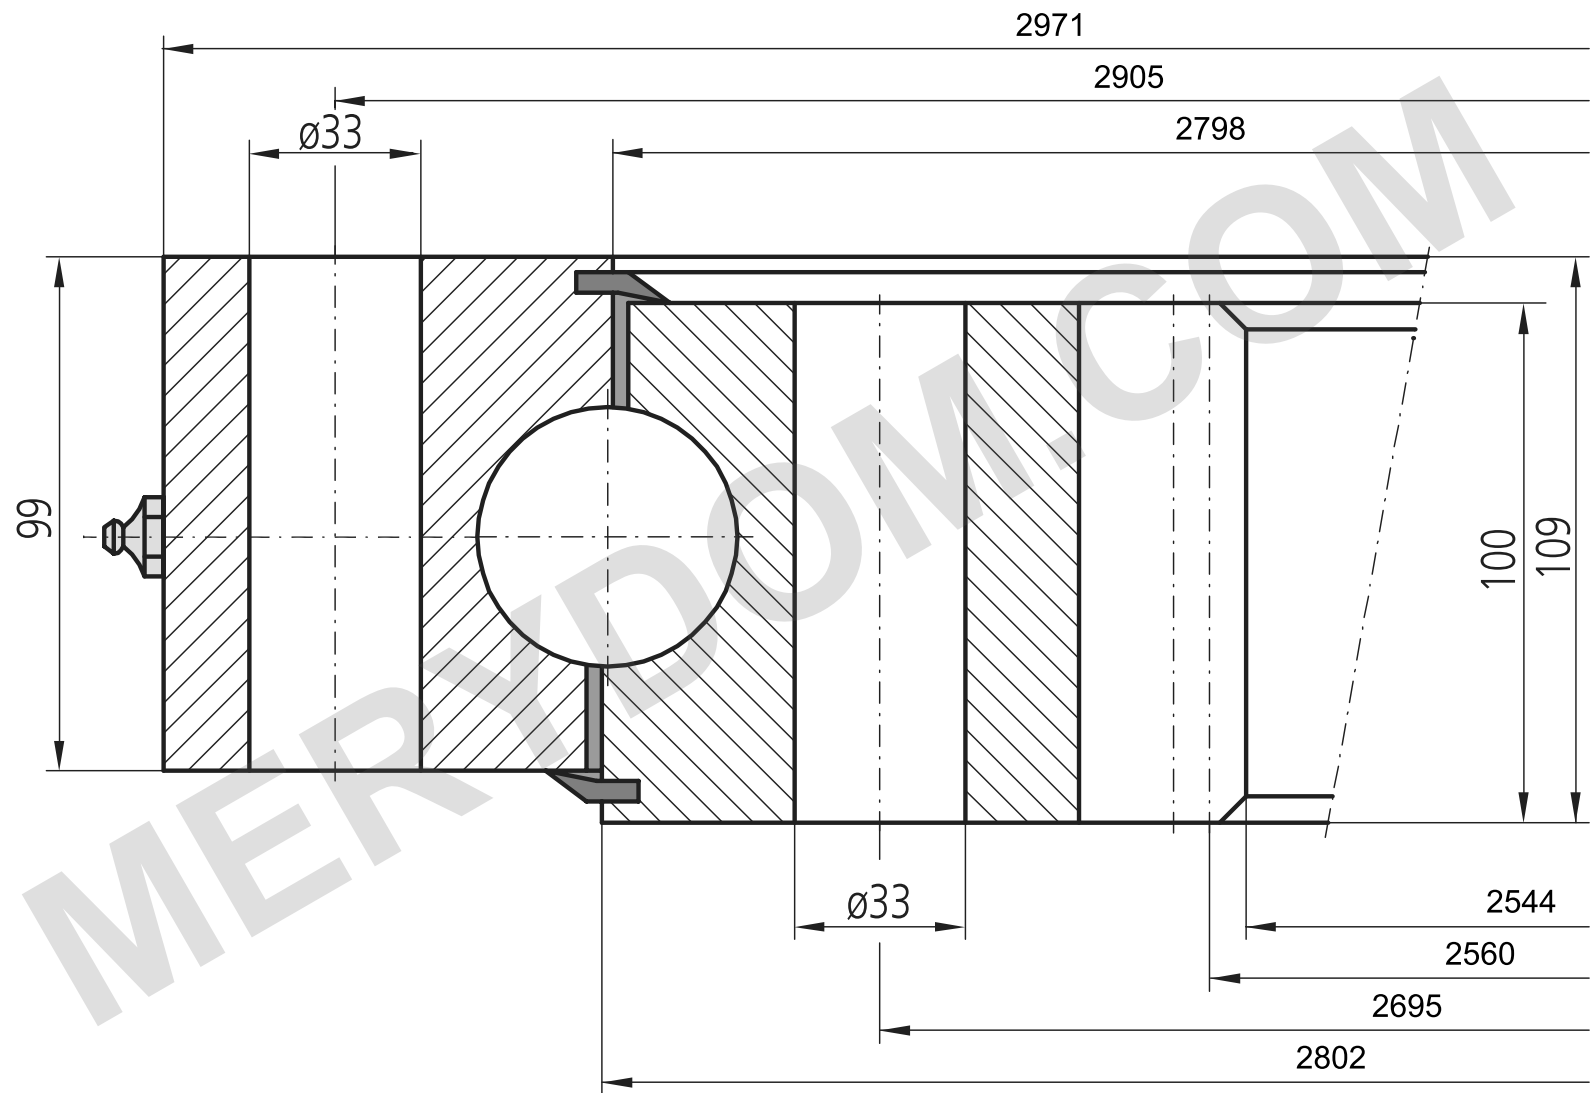

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

12-50 2800/2-06540

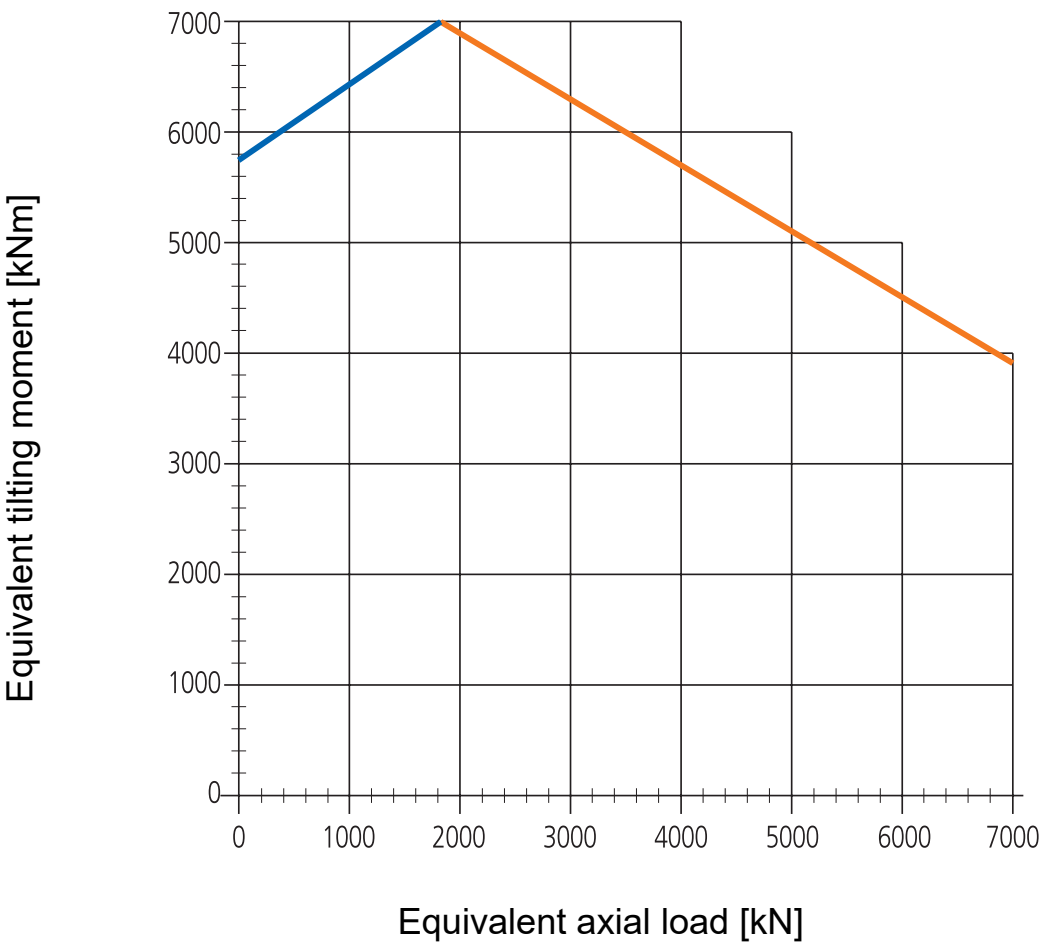

- Bolt curve Rp0.2 · Bolt grade 10.9
- Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
Original catalogue dimensions and section details retained.
Outer ring: 60 × $\varnothing 33$ · La $\varnothing 2905$
Inner ring: 60 × $\varnothing 33$ · Li $\varnothing 2695$
Reference: IMO · PDF 14
OD $\varnothing 2971$ · ID $\varnothing 2544$ · H 109 · La $\varnothing 2905$ · Li $\varnothing 2695$ mm
IMO 12-50 2800/2-06540 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Single-row four-point contact ball

12-50 2800/2-06540

Reference: IMO / 12-50

mm · NTS · REV 1.0 · Sheet 1/1