



BEARING SECTION

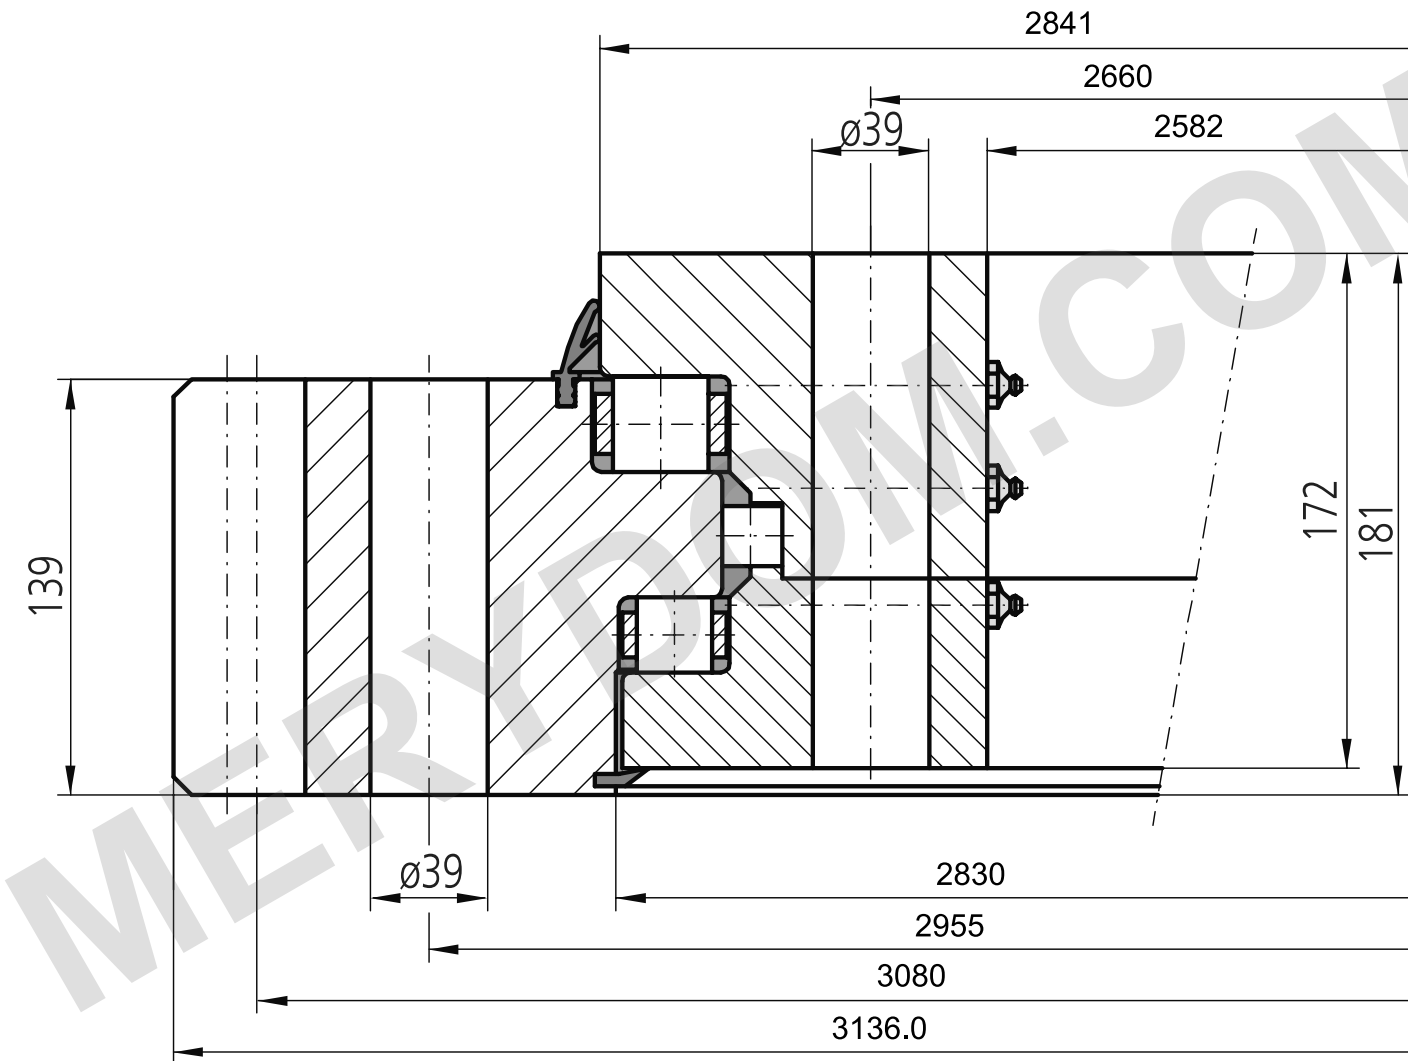

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

31-32 2800/2-07320

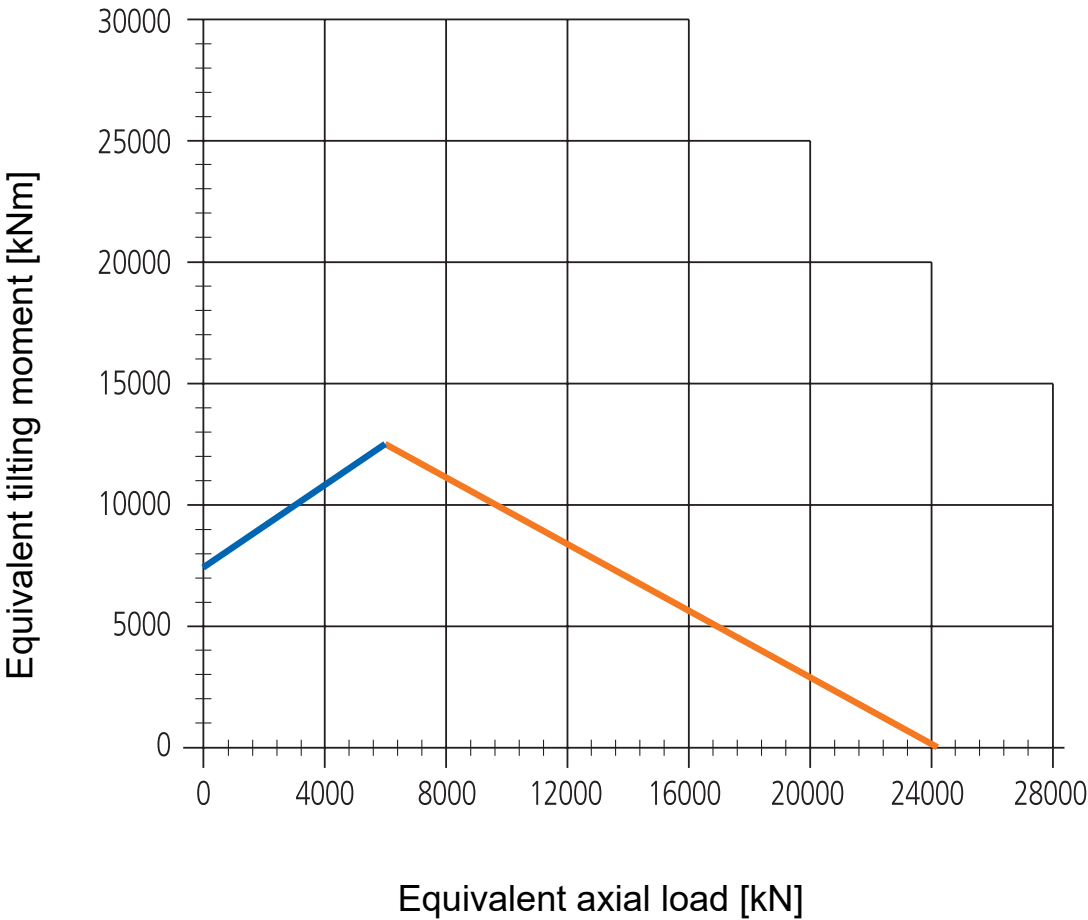

- Bolt curve $R_{p0.2}$ · Bolt grade 10.9
- Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
Original catalogue dimensions and section details retained.
Outer ring: 48 × $\varnothing 39$ · La $\varnothing 2955$
Inner ring: 48 × $\varnothing 39$ · Li $\varnothing 2660$
Reference: IMO · PDF 8
OD $\varnothing 3136$ · ID $\varnothing 2582$ · H 181 · La $\varnothing 2955$ · Li $\varnothing 2660$ mm
IMO 31-32 2800/2-07320 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Triple-row roller slewing bearing

31-32 2800/2-07320

Reference: IMO / 31-32

mm · NTS · REV 1.0 · Sheet 1/1