



BEARING SECTION

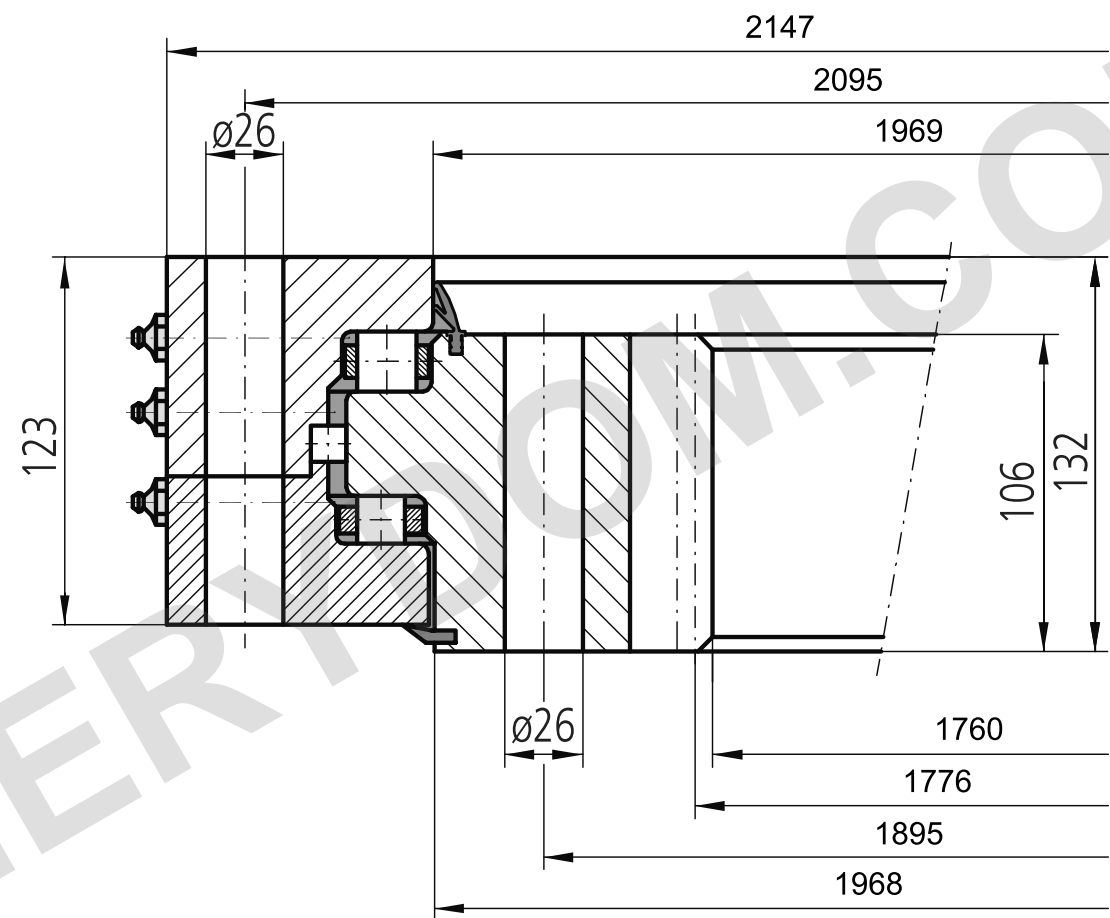

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

32-20 2000/2-06790

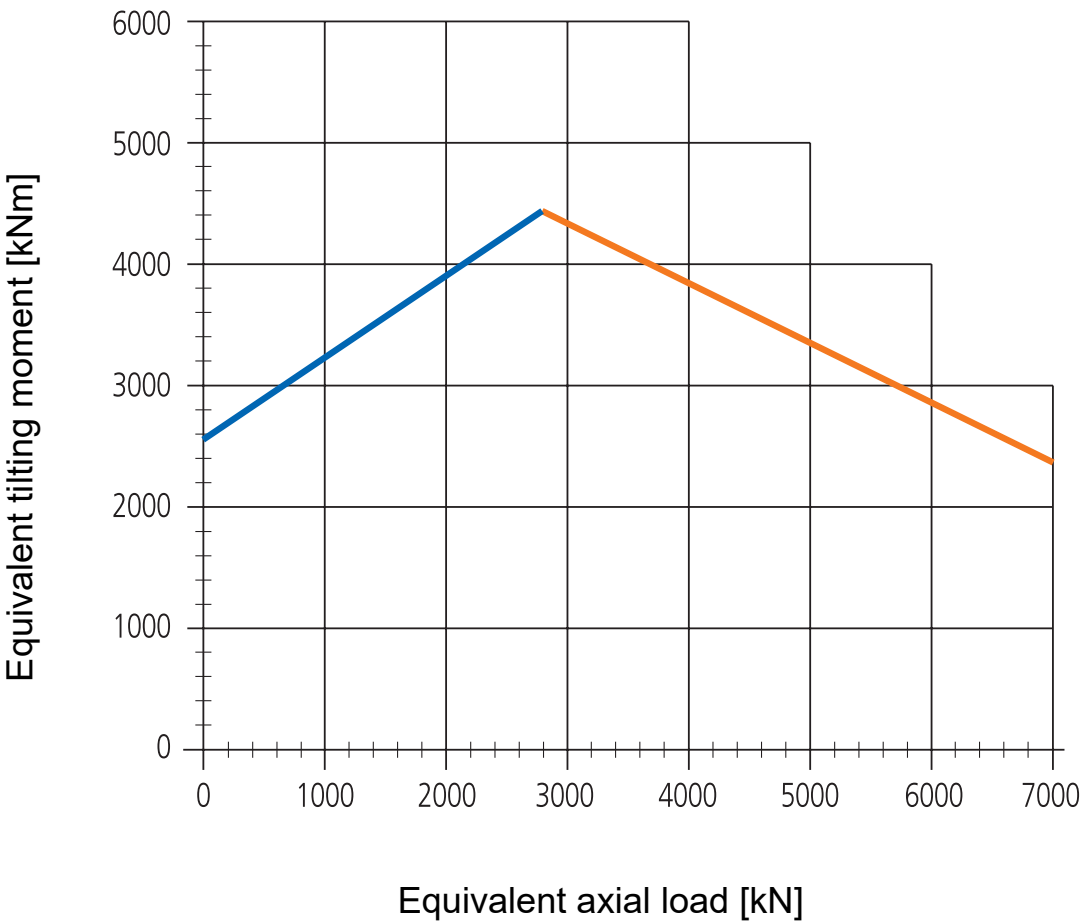

- Bolt curve Rp0.2 · Bolt grade 10.9
- Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
Original catalogue dimensions and section details retained.
Outer ring: 54 × $\varnothing 26$ · La $\varnothing 2095$
Inner ring: 54 × $\varnothing 26$ · Li $\varnothing 1895$
Reference: IMO · PDF 4
OD $\varnothing 2147$ · ID $\varnothing 1760$ · H 132 · La $\varnothing 2095$ · Li $\varnothing 1895$ mm
IMO 32-20 2000/2-06790 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Triple-row roller slewing bearing

32-20 2000/2-06790

Reference: IMO / 32-20

mm · NTS · REV 1.0 · Sheet 1/1