



BEARING SECTION

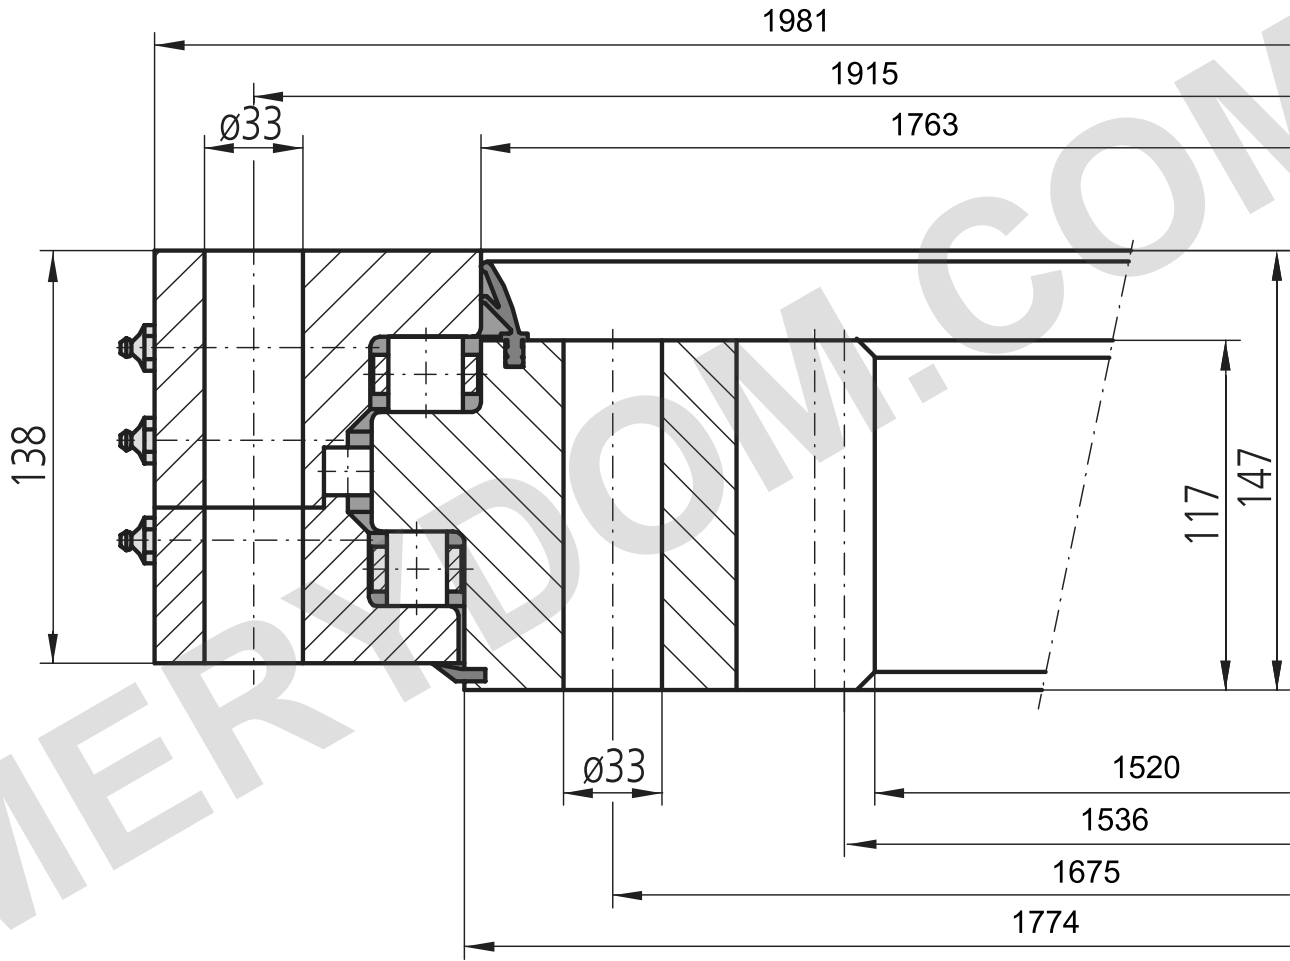

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

32-25 1800/2-06850

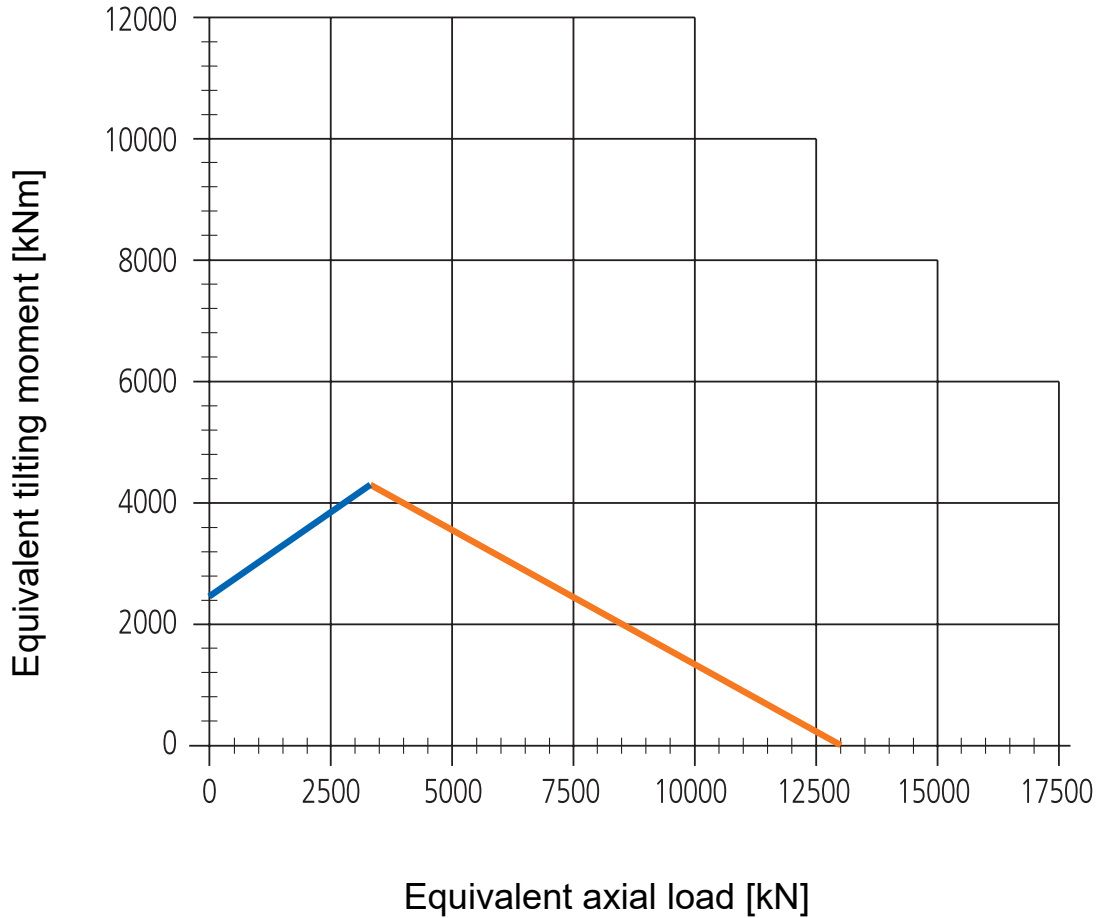

— Bolt curve Rp0.2 · Bolt grade 10.9

— Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

Original catalogue dimensions and section details retained

Outer ring: 36 × Ø33 · La Ø1915

Inner ring: 36 × Ø33 · Li Ø1675

Reference: IMO · PDF 6

OD Ø1981 · ID Ø1520 · H 147 · La Ø1915 · Li Ø1675 mm

IMO 32-25 1800/2-06850 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Triple-row roller slewing bearing

32-25 1800/2-06850

Reference: IMO / 32-25

mm · NTS · REV 1.0 · Sheet 1/1