



BEARING SECTION

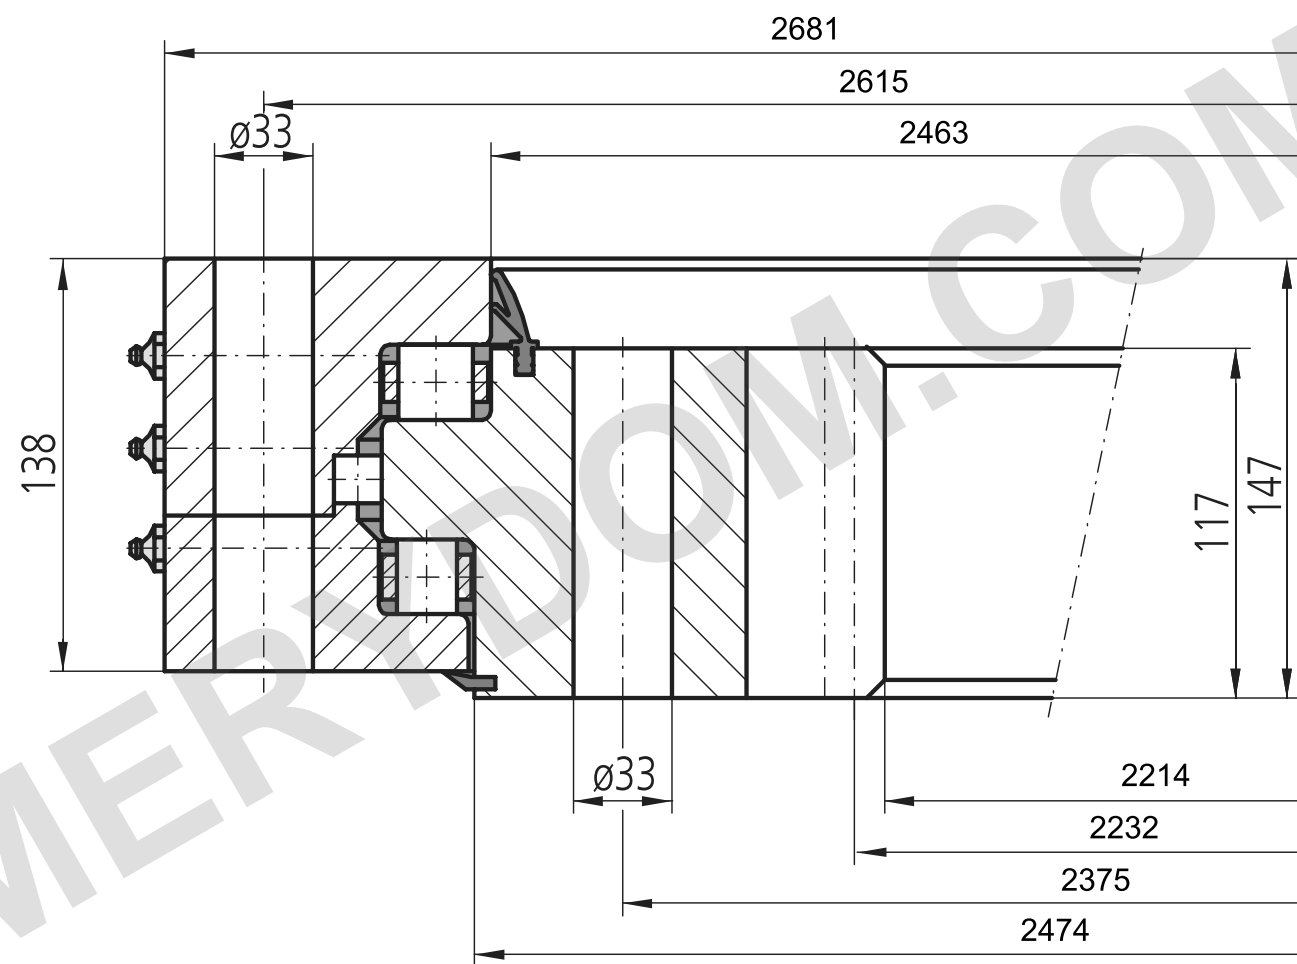

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

32-25 2500/2-06880

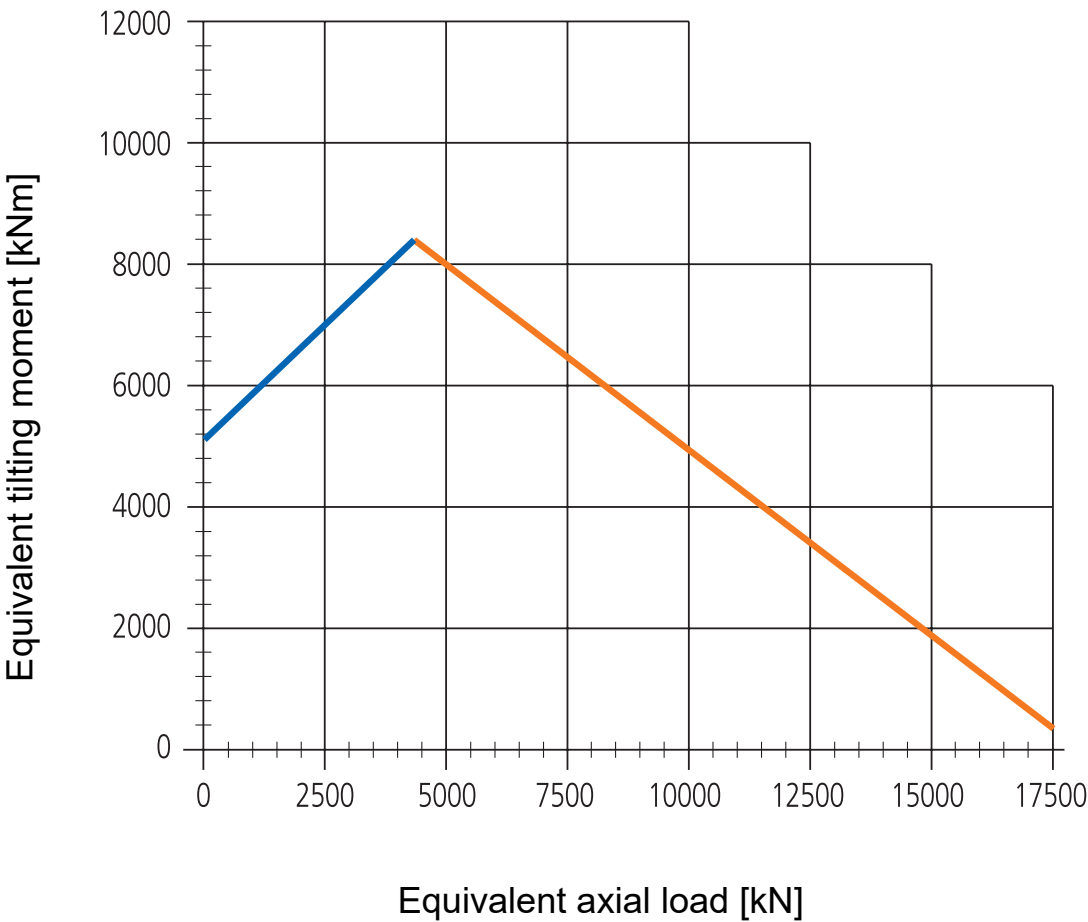

- Bolt curve Rp0.2 · Bolt grade 10.9
- Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
Original catalogue dimensions and section details retained.
Outer ring: 54 × Ø33 · La Ø2615
Inner ring: 54 × Ø33 · Li Ø2375
Reference: IMO · PDF 6
OD Ø2681 · ID Ø2214 · H 147 · La Ø2615 · Li Ø2375 mm
IMO 32-25 2500/2-06880 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Triple-row roller slewing bearing

32-25 2500/2-06880

Reference: IMO / 32-25

mm · NTS · REV 1.0 · Sheet 1/1