



BEARING SECTION

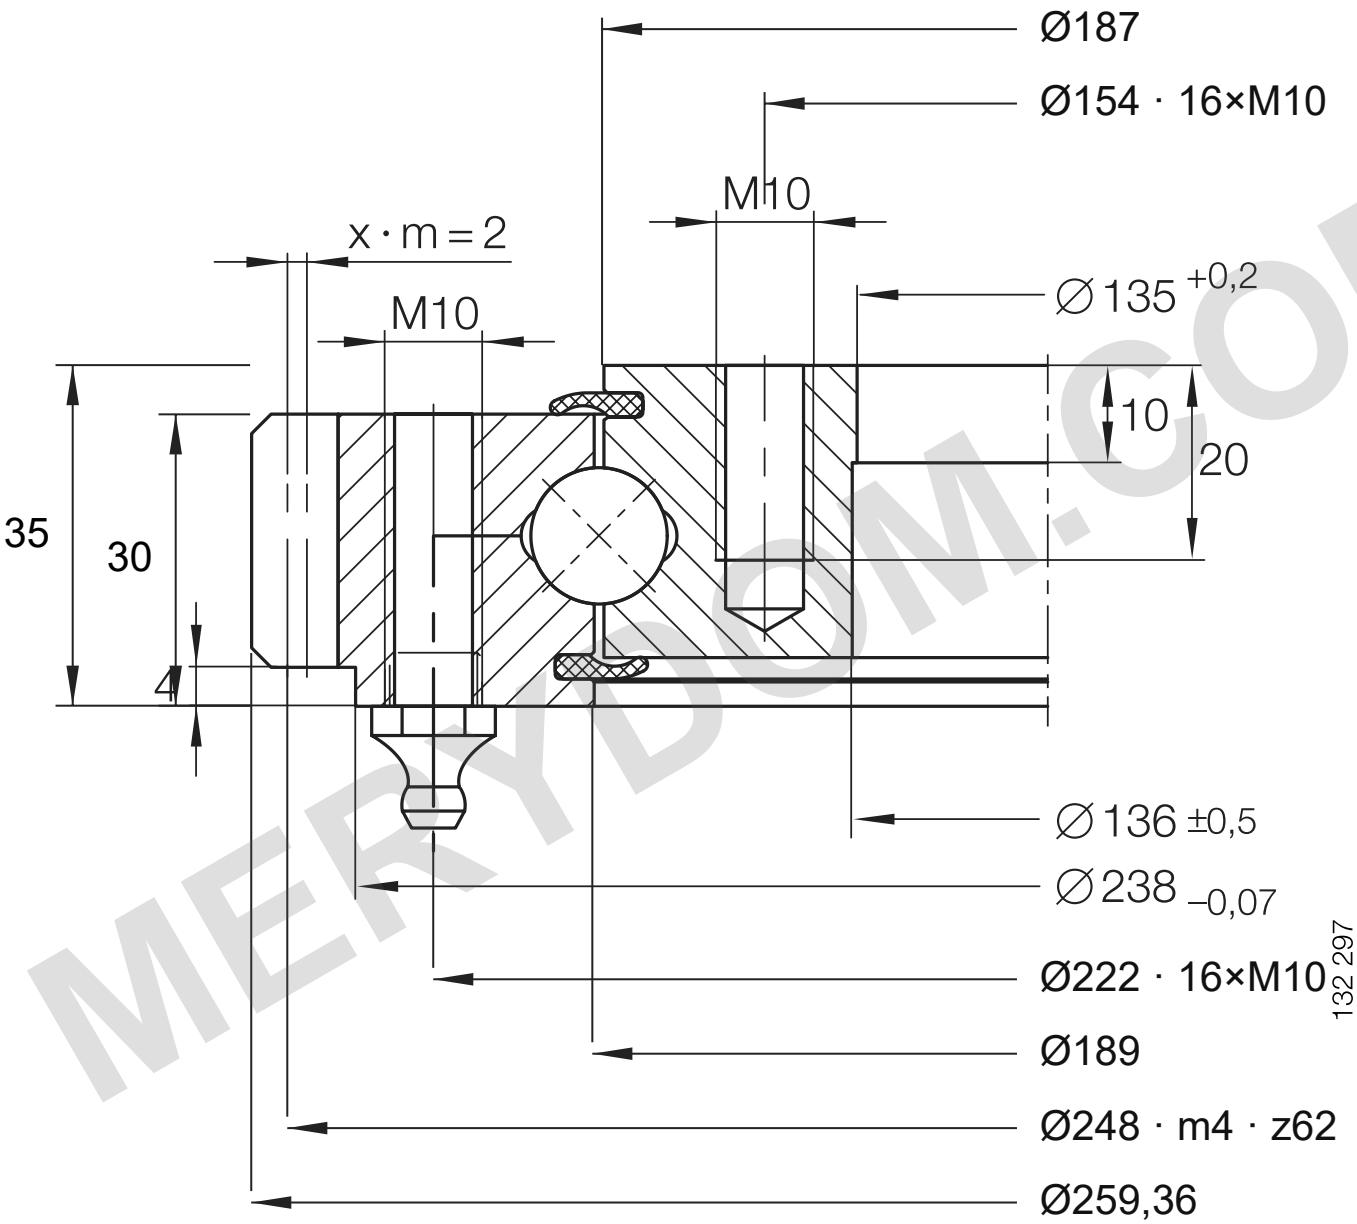


LIMITING LOAD DIAGRAM

VA 140188 V

Fixing screws · Supported load

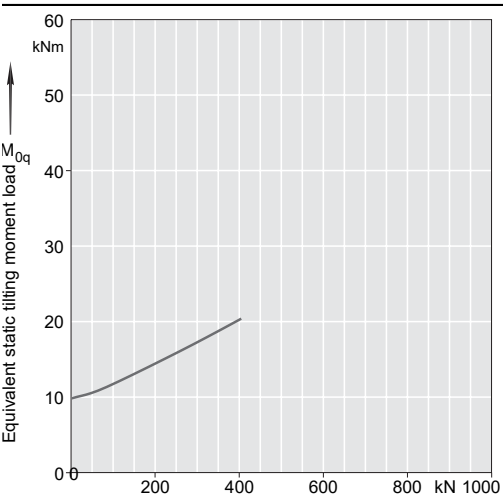

Raceway · Supported load

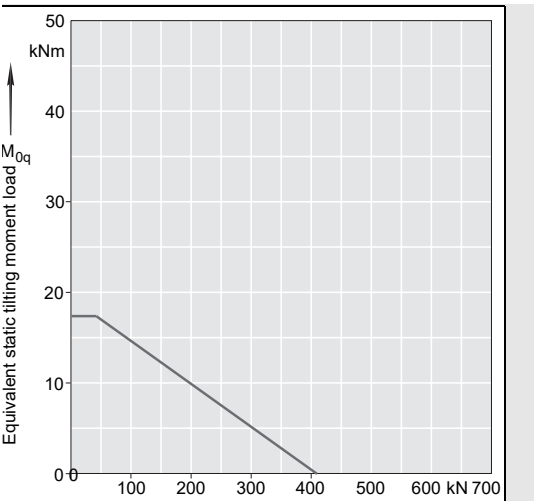

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

Source lubrication: 2 axial DIN 71412-A M10×1 fittings on the underside.

Reference: INA · 404 · PDF 73 / 72 / 73

OD $\varnothing 259.36$ · ID $\varnothing 135$ · H 35 · La $\varnothing 222$ · Li $\varnothing 154$ mm

INA VA 140188 V — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

VA 140188 V

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1