


BEARING SECTION

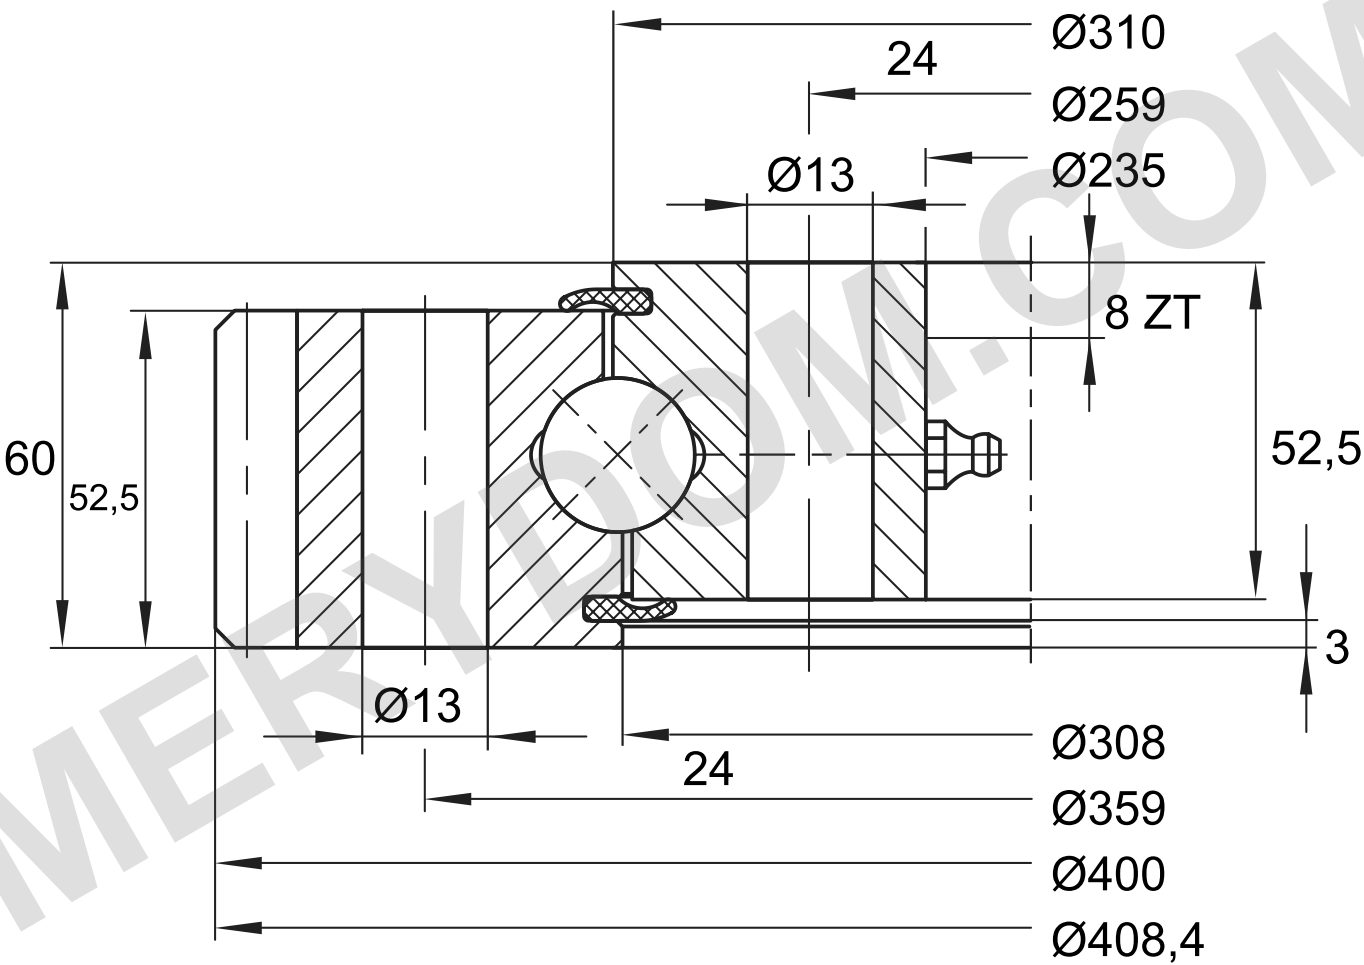


132 325


LIMITING LOAD DIAGRAM

VA 250309 N

Fixing screws · Supported load

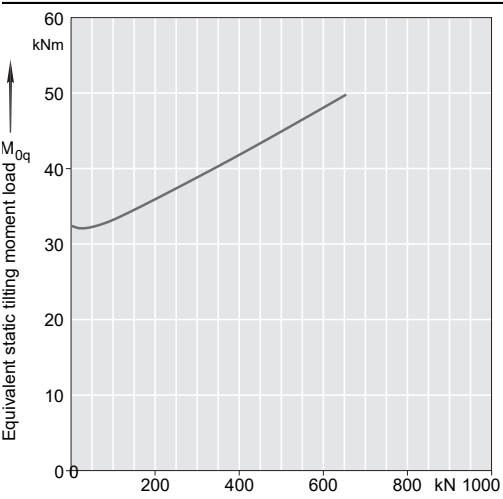

Raceway · Supported load

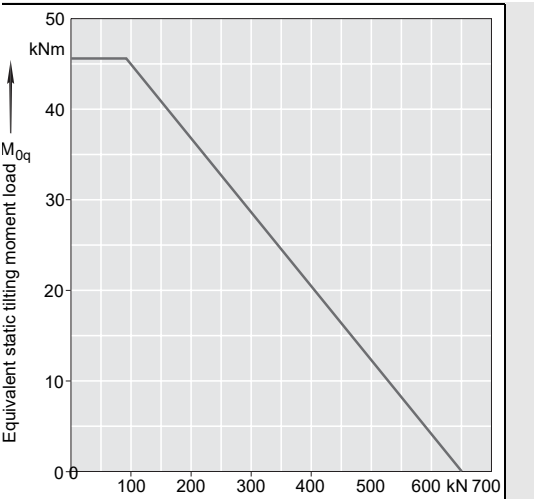

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

ZT dimensions apply only to the optional centred version.

Reference: INA · 404 · PDF 72 / 72 / 73

Illustrative lubrication defaults: thread M8×1.

Adjustable after customer confirmation.

OD Ø408.4 · ID Ø235 · H 60 · La Ø359 · Li Ø259 mm

INA VA 250309 N — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

VA 250309 N

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1