


BEARING SECTION


LIMITING LOAD DIAGRAM

VU 200405

Fixing screws · Supported load

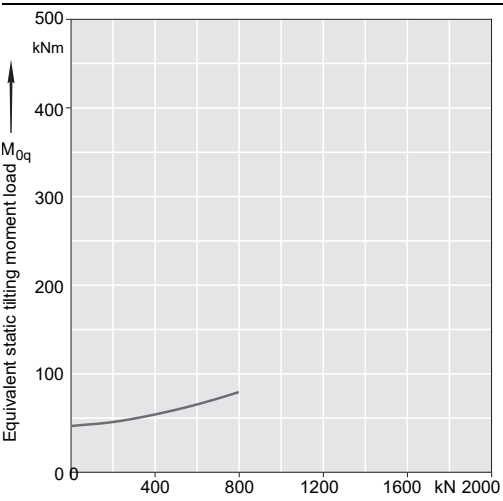

Raceway · Supported load

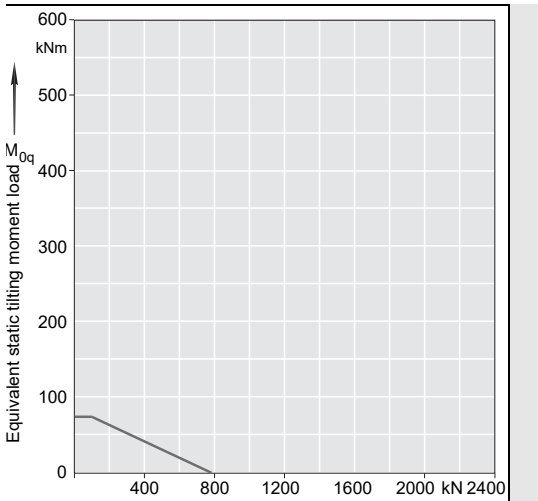

Equivalent static axial load  $F_{0q}$  [kN]

Equivalent static tilting moment  $M_{0q}$  [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

ZT dimensions apply only to the optional centred version.

Reference: INA · 404 · PDF 78 / 78 / 79

Illustrative lubrication defaults: count 4, thread M8×1.

Adjustable after customer confirmation.

OD Ø474 · ID Ø336 · H 46 · La Ø450 · Li Ø360 mm

INA VU 200405 — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

VU 200405

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1