



BEARING SECTION

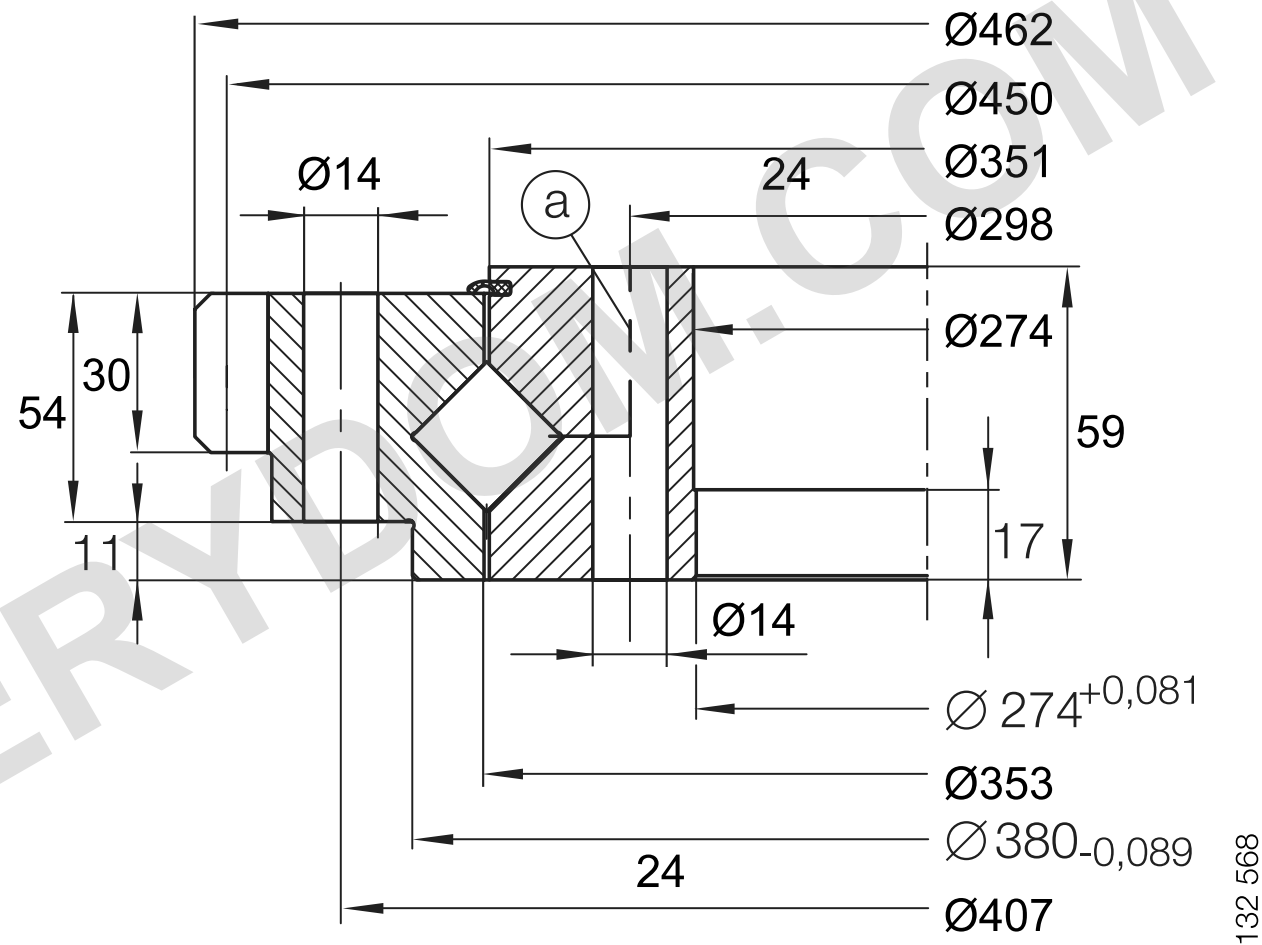


LIMITING LOAD DIAGRAM

XA 200352 H

Fixing screws · Supported load

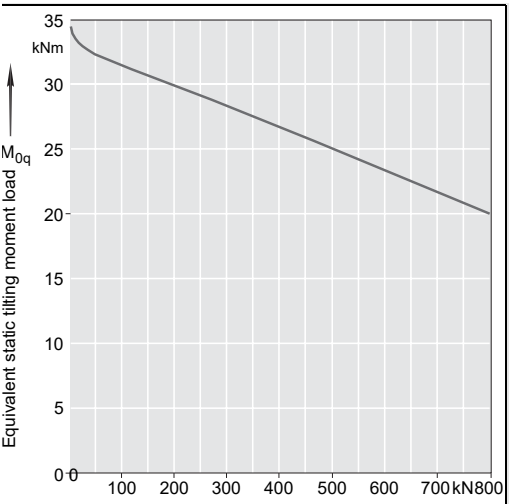

Raceway · Supported load

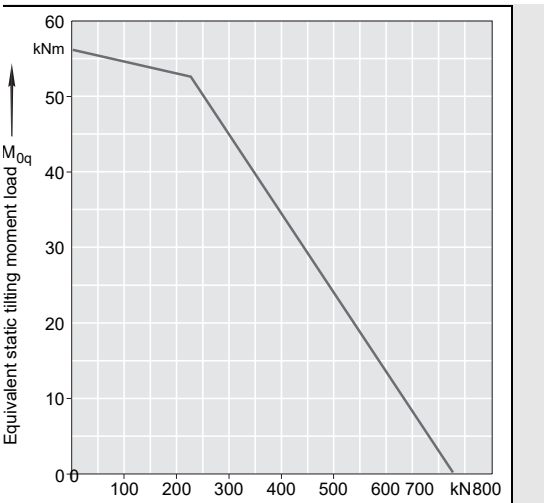

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

Unlabelled steps are illustrative and adjustable after customer confirmation.

Reference: INA · 404 · PDF 91 / 90 / 91

a: 1 lubrication hole M12×1, 10 mm deep (original catalogue).

XA: relative axial step positions and lubrication-hole location are illustrative.

OD Ø462 · ID Ø274 · H 59 · La Ø407 · Li Ø298 mm

INA XA 200352 H — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

XA 200352 H

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1