


BEARING SECTION

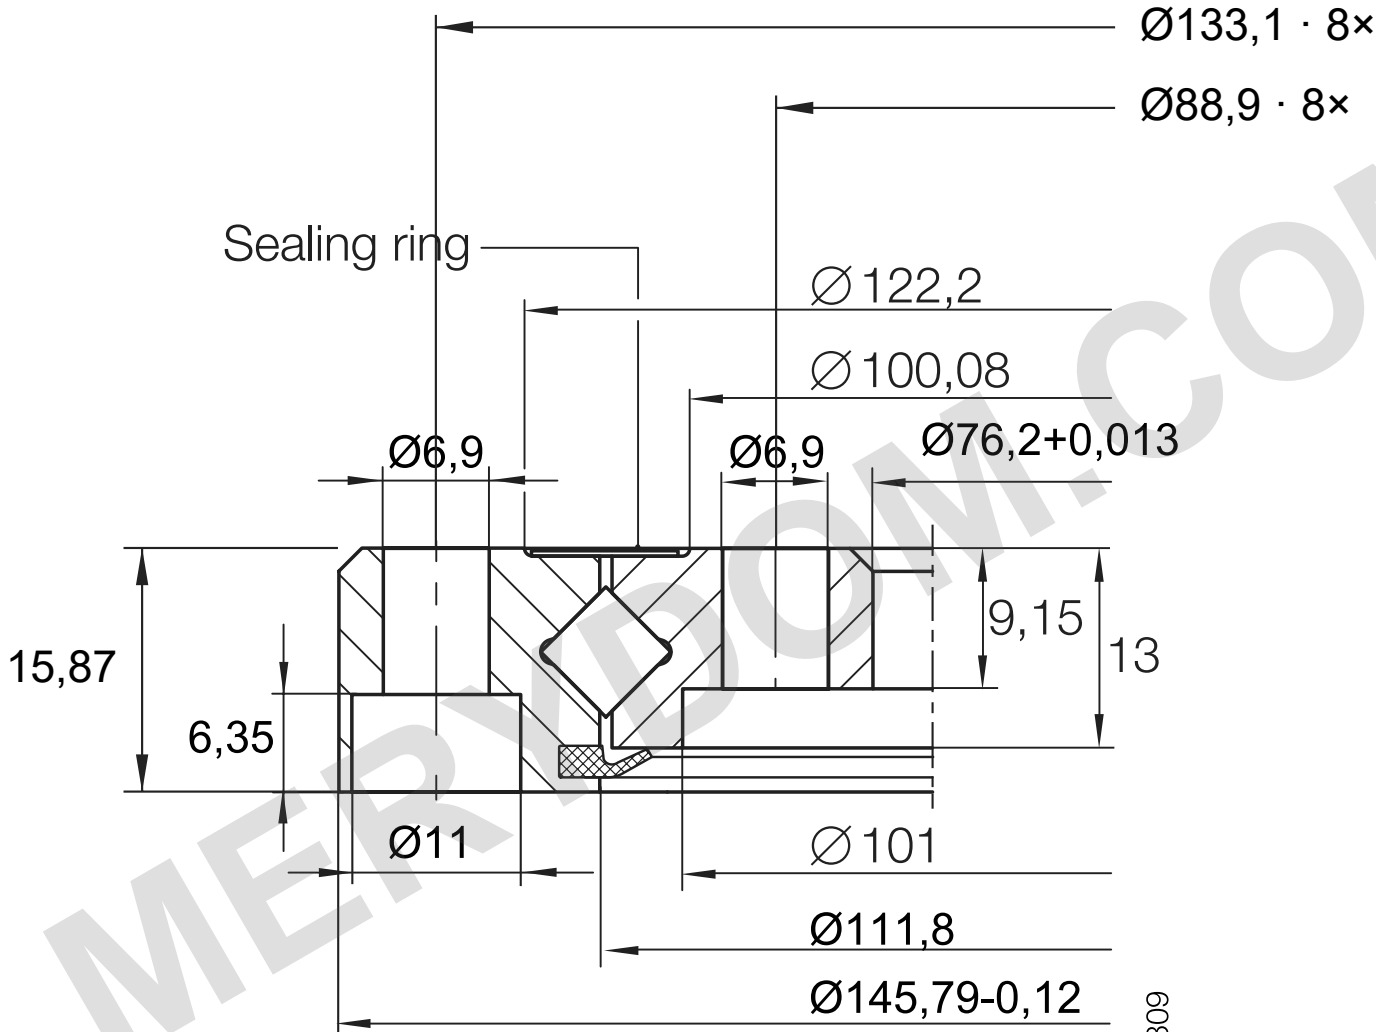

132 309

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

Source external geometry and mounting dimensions retained; internal contact details illustrative.

Reference: INA · 404 · PDF 93 / 92 / 93

Internal contact details illustrative; adjustable after customer confirmation.

Illustrative lubrication defaults: 4 fittings, M8×1; customer-adjustable.


OD Ø145.79 · ID Ø76.2 · H 15.87 · La Ø133.1 · Li Ø88.9 mm

INA XU 060111 — CAD Drawing (PDF) | MERYDOM


LIMITING LOAD DIAGRAM

XU 060111

Fixing screws · Supported load

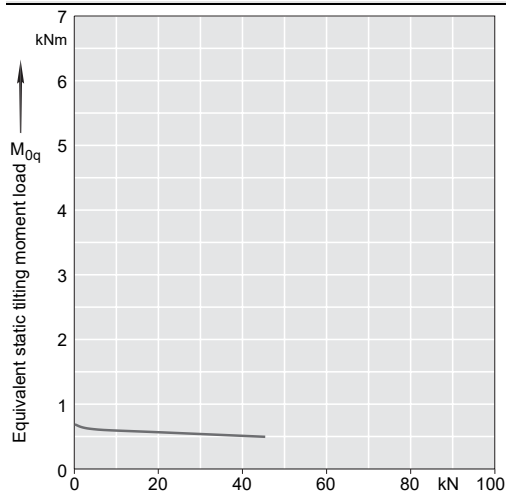

Raceway · Supported load

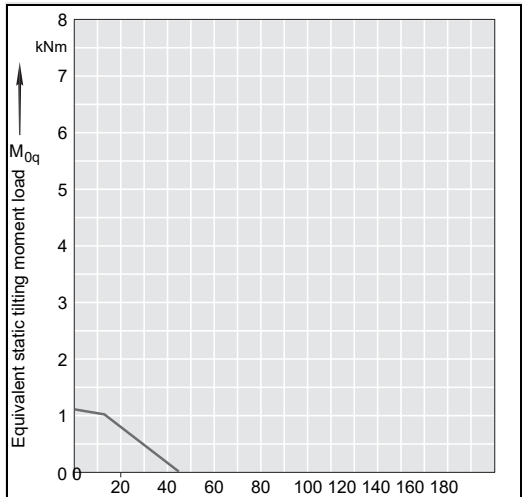

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0g} [kNm]

Follow the technical information in the source catalogue.

MERYDOM

BEARING SECTION

XU 060111

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1