


BEARING SECTION

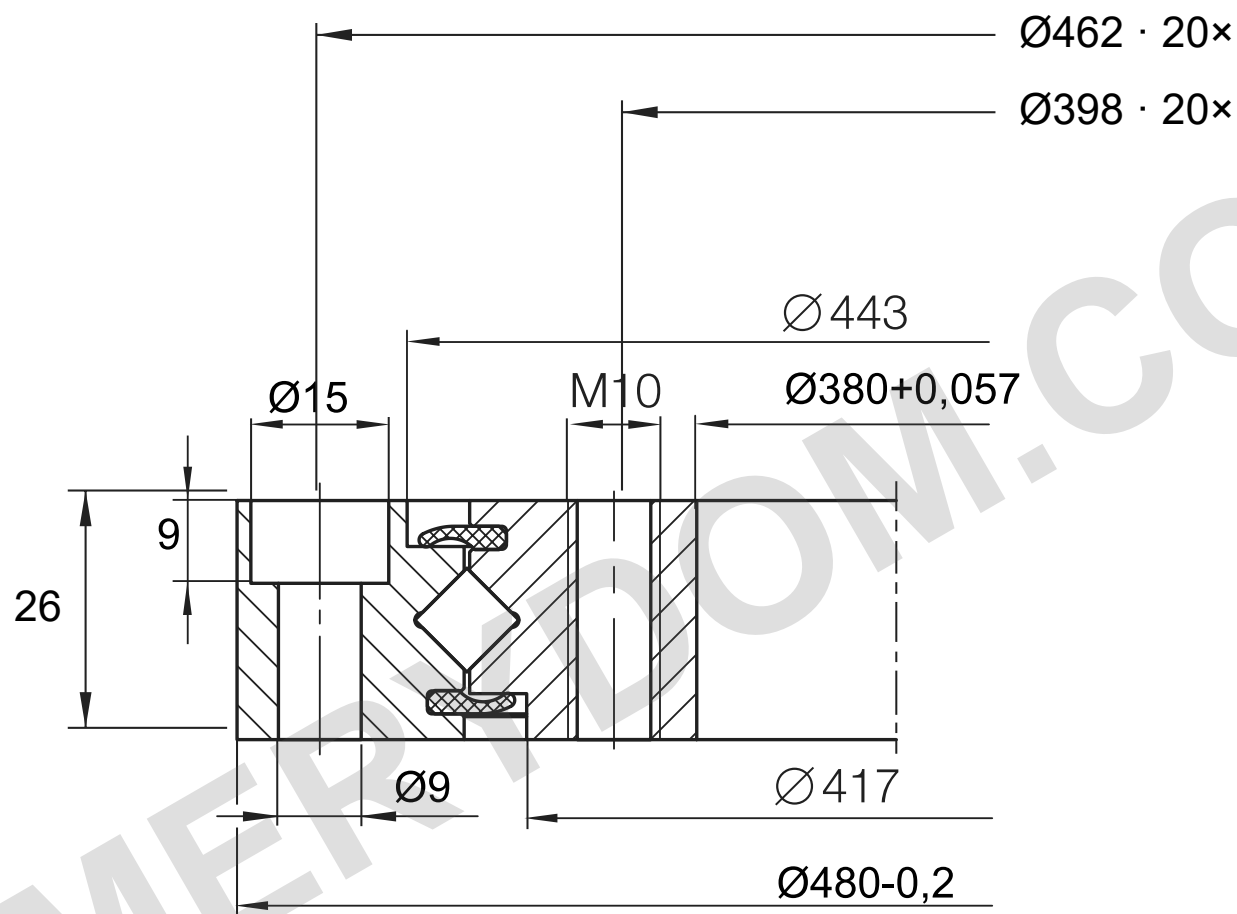


132 314


LIMITING LOAD DIAGRAM

XU 080430

Fixing screws · Supported load

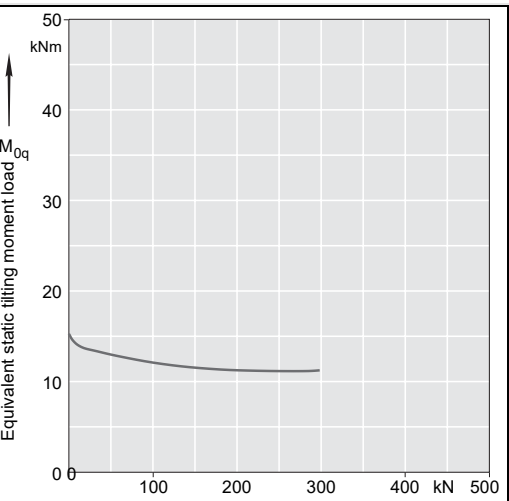

Raceway · Supported load

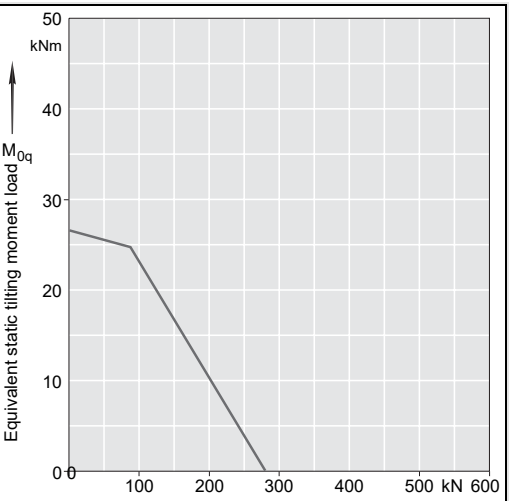

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

Internal transitions are illustrative; external and mounting dimensions follow the source.

Reference: INA · 404 · PDF 95 / 94 / 94

Illustrative internal transition length: 4 mm; adjustable after customer confirmation.

Original source: no relubrication facility.

OD $\varnothing 480$ · ID $\varnothing 380$ · H 26 · La $\varnothing 462$ · Li $\varnothing 398$ mm

INA XU 080430 — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

XU 080430

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1