


Technical drawing of a mechanical assembly in cross-section. The drawing shows a base plate with a central diamond-shaped component. Dimensions include diameters (Ø14, Ø191, Ø215, Ø259, Ø261, Ø305, Ø329) and various linear measurements (3,5, 20, 46, 41, 7). A watermark 'MEP' is visible across the drawing.

Technical drawing of a mechanical assembly in cross-section. The drawing shows a base plate with a central diamond-shaped component. Dimensions include diameters (Ø14, Ø191, Ø215, Ø259, Ø261, Ø305, Ø329) and various linear measurements (3,5, 20, 46, 41, 7). A watermark 'MEP' is visible across the drawing.

Parafusos de fixação · Carga apoiada

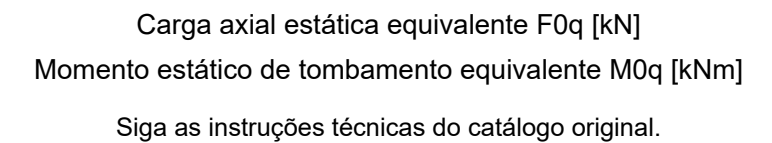

Dimensões em mm. Seção do catálogo; sem escala.

As dimensões ZT valem apenas para a versão centrada opcional.

Referência: INA · 404 · PDF 94 / 94 / 94

Valores ilustrativos de lubrificação: quantidade 4, rosca M8×1.

Ajustáveis após confirmação do cliente.

OD Ø329 · ID Ø191 · H 46 · La Ø305 · Li Ø215 mm

INA XU 160260 — Desenho CAD (PDF) | MERYDOM

MERYDOM
SEÇÃO DO ROLAMENTO
XU 160260
Referência: INA / 404
mm · NTS · REV 1.0 · Folha 1/1