


BEARING SECTION

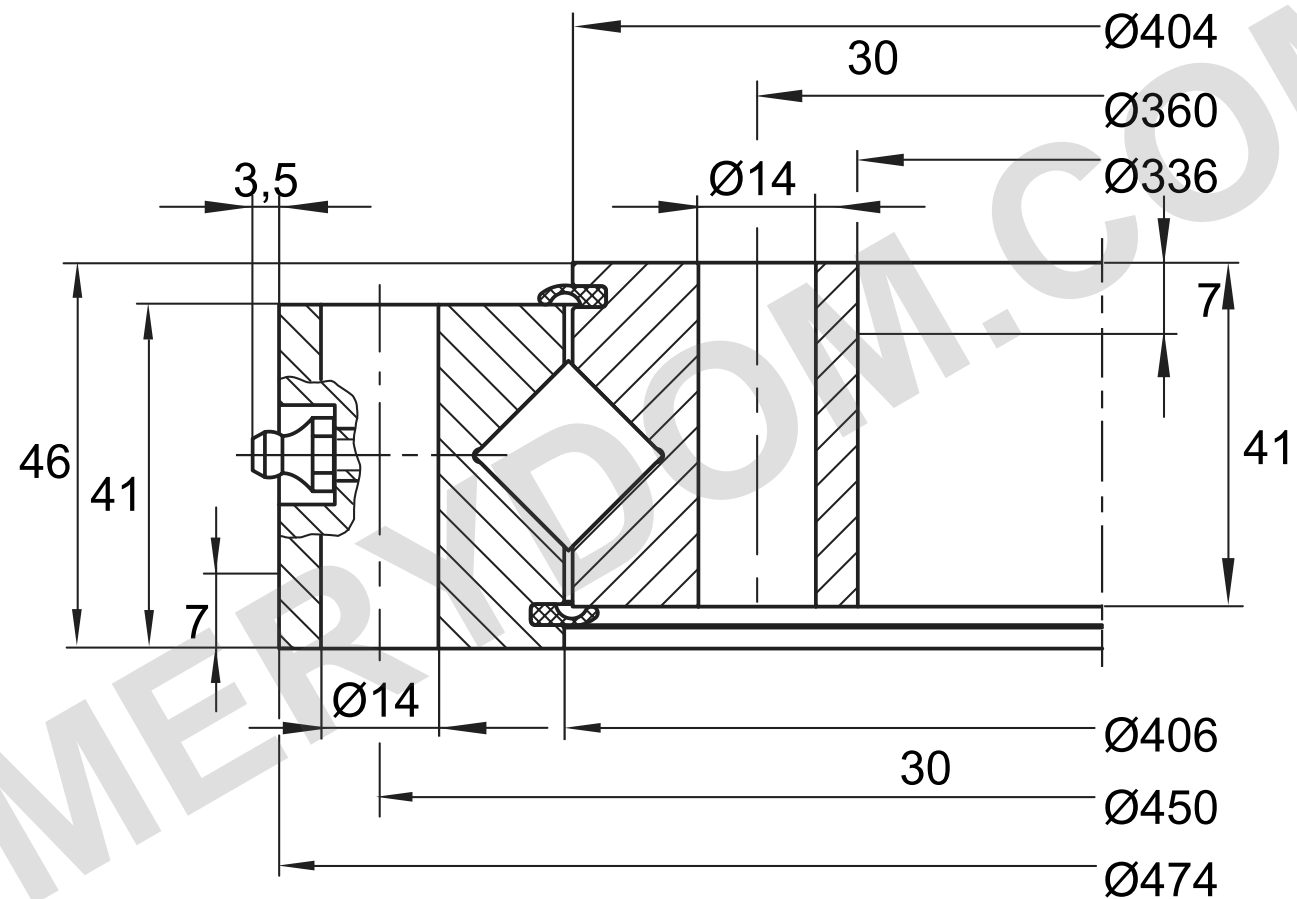


132 141a


LIMITING LOAD DIAGRAM

XU 160405

Fixing screws · Supported load

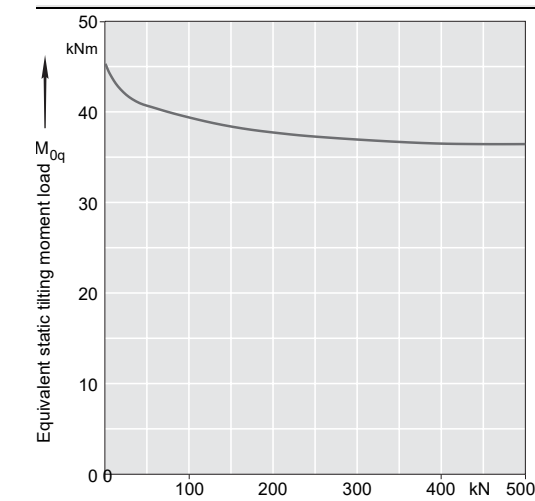

Raceway · Supported load

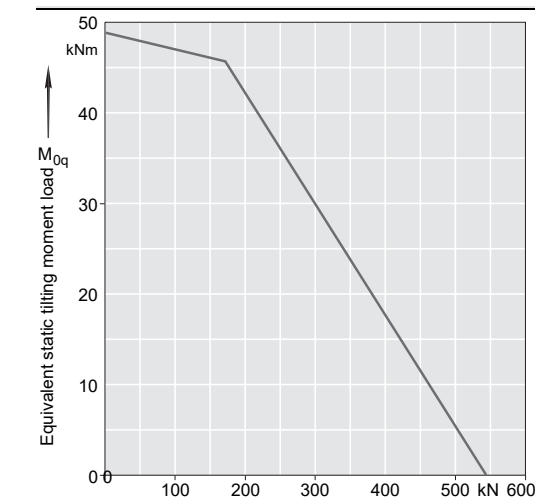

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

ZT dimensions apply only to the optional centred version.

Reference: INA · 404 · PDF 94 / 94 / 94

Illustrative lubrication defaults: count 4, thread M8×1.

Adjustable after customer confirmation.

OD Ø474 · ID Ø336 · H 46 · La Ø450 · Li Ø360 mm

INA XU 160405 — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

XU 160405

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1