


BEARING SECTION


LOAD CAPACITY

KAYDON MTE-415T — Load capacity curve

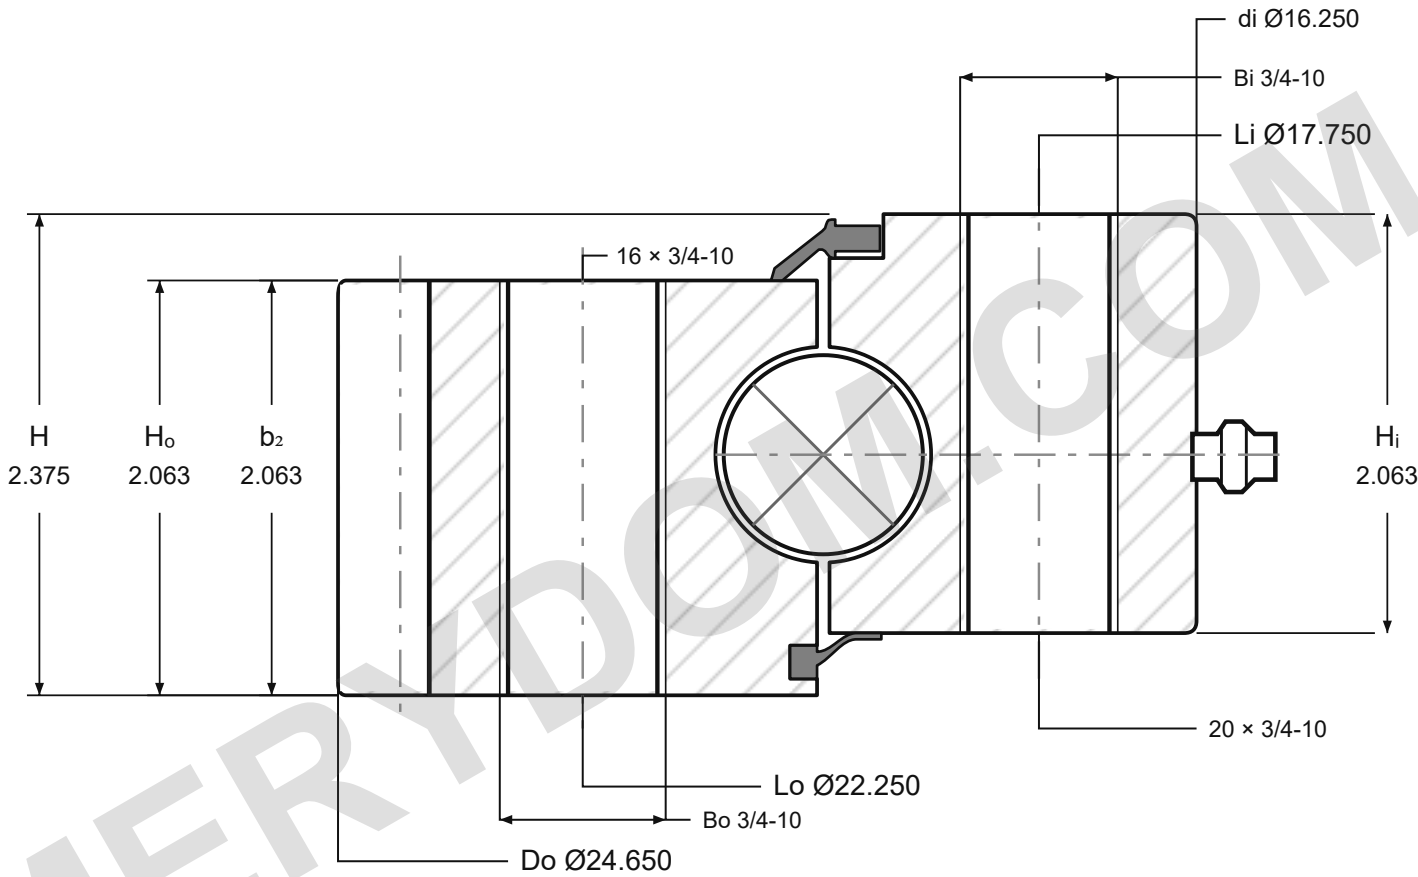

EXTERNAL GEAR DATA

SD stub involute · 20° · b2 2.063 in · D2 24.250 in
Pd 4 · z2 97 · Fz 10,420 lb · Crm 159,200 ft-lbs

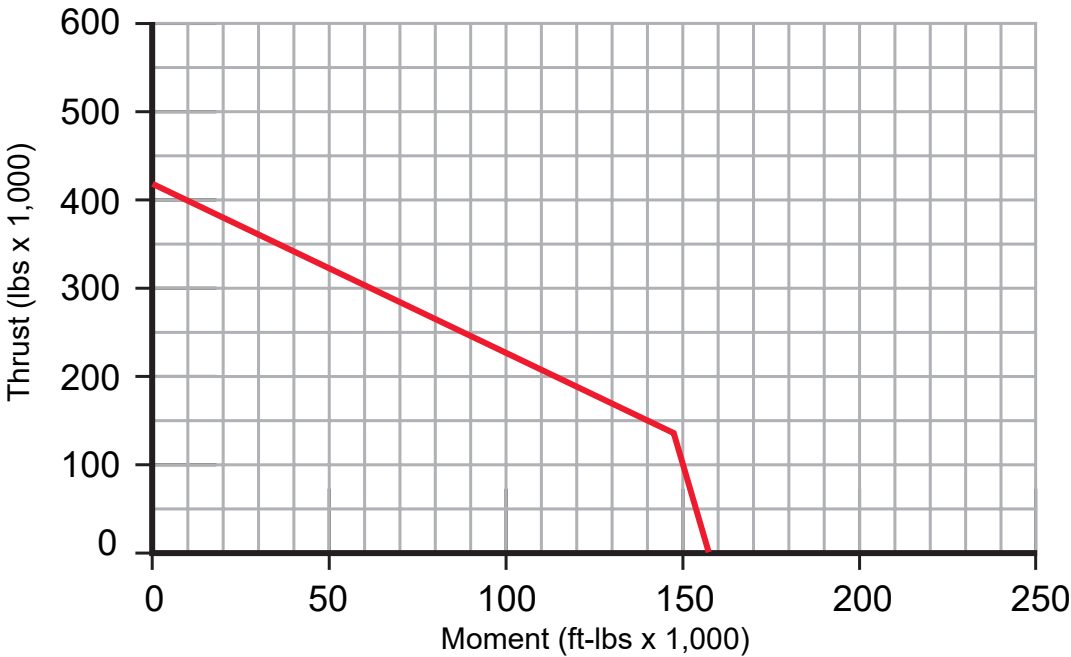

Original Kaydon MT-series chart · Catalogue 390

Series reference: MT-415.

Normal operation and installation conditions apply.

Bo / Bi: minimum thread depth 1.125 in.
Catalogue 390, printed p63: 1.5 × nominal thread diameter.

REFERENCE NOTES

Dimensions in inches. Reference drawing; do not scale.
Source: Kaydon Catalogue 390 · table p68 · curve p71 (MT-415).
OD $\varnothing 24.650$ · ID $\varnothing 16.250$ · H 2.375 · Lo $\varnothing 22.250$ · Li $\varnothing 17.750$ in
KAYDON MTE-415T — Product page | MERYDOM

MERYDOM
BEARING SECTION
MTE-415T
SOURCE: KAYDON / 390
in · NTS · REV 2.5 · SHEET 1/1