


BEARING SECTION


LOAD CAPACITY

KAYDON MTE-540T — Load capacity curve

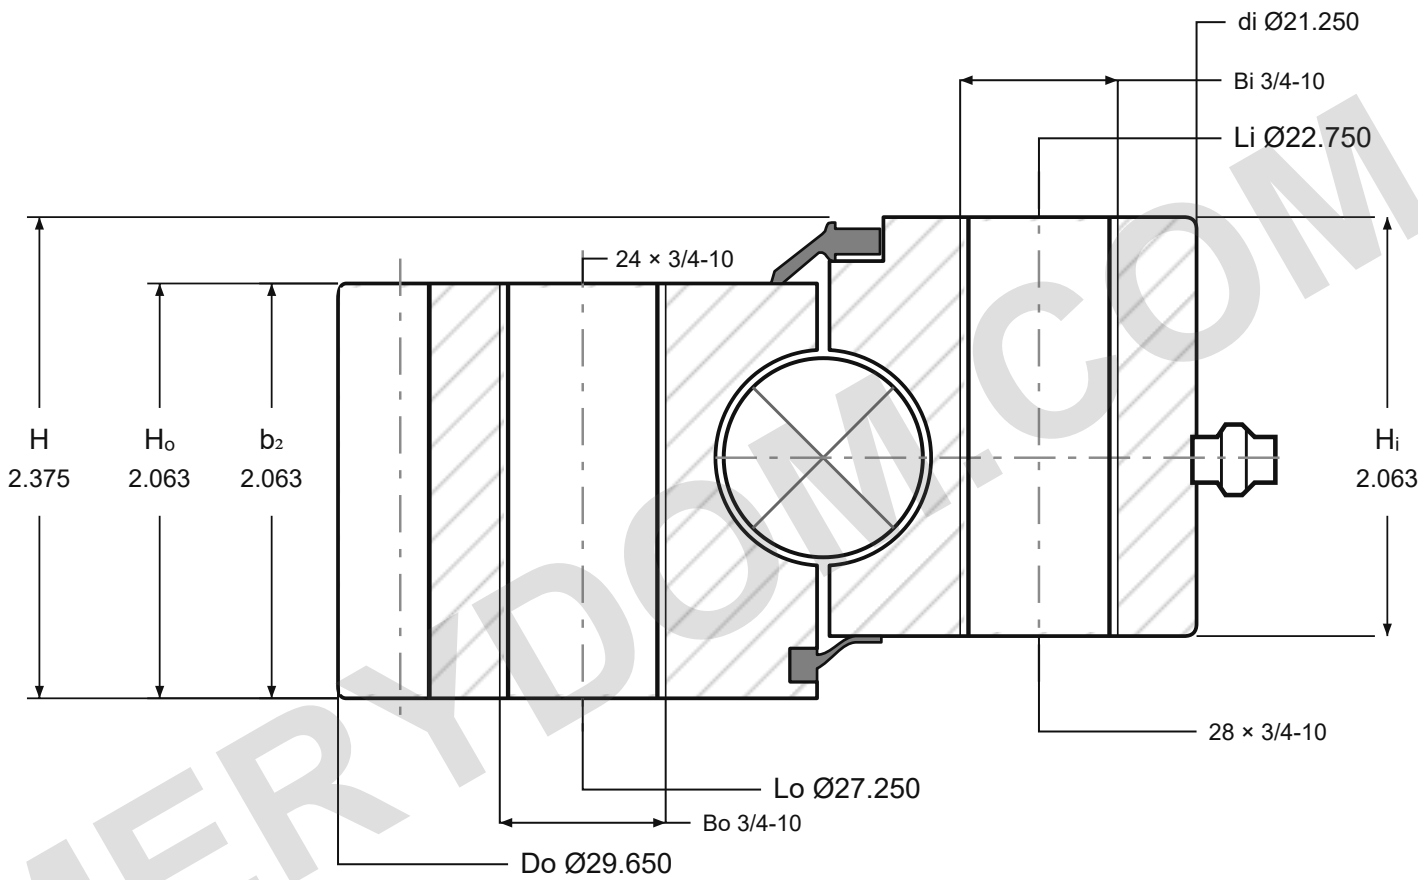

EXTERNAL GEAR DATA

SD stub involute · 20° · b2 2.063 in · D2 29.250 in
Pd 4 · z2 117 · Fz 10,520 lb · Crm 232,000 ft-lbs

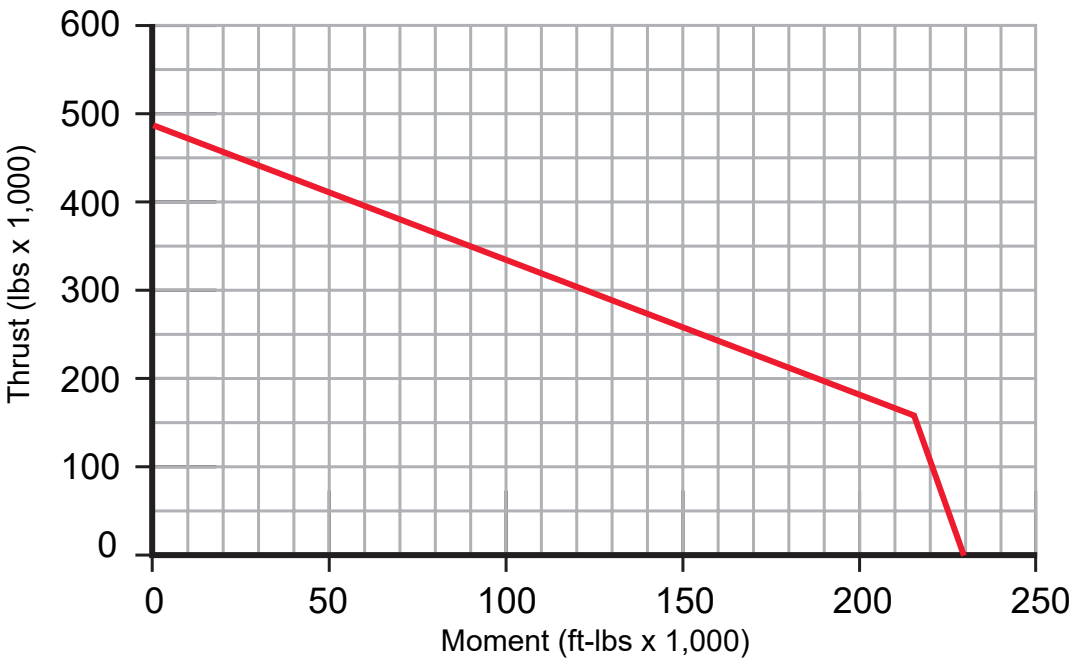

Original Kaydon MT-series chart · Catalogue 390

Series reference: MT-540.

Normal operation and installation conditions apply.

Bo / Bi: minimum thread depth 1.125 in.
Catalogue 390, printed p63: 1.5 × nominal thread diameter.

REFERENCE NOTES

Dimensions in inches. Reference drawing; do not scale.
Source: Kaydon Catalogue 390 · table p68 · curve p71 (MT-540).
OD Ø29.650 · ID Ø21.250 · H 2.375 · Lo Ø27.250 · Li Ø22.750 in
KAYDON MTE-540T — Product page | MERYDOM

MERYDOM
BEARING SECTION
MTE-540T
SOURCE: KAYDON / 390
in · NTS · REV 2.5 · SHEET 1/1