



BEARING SECTION

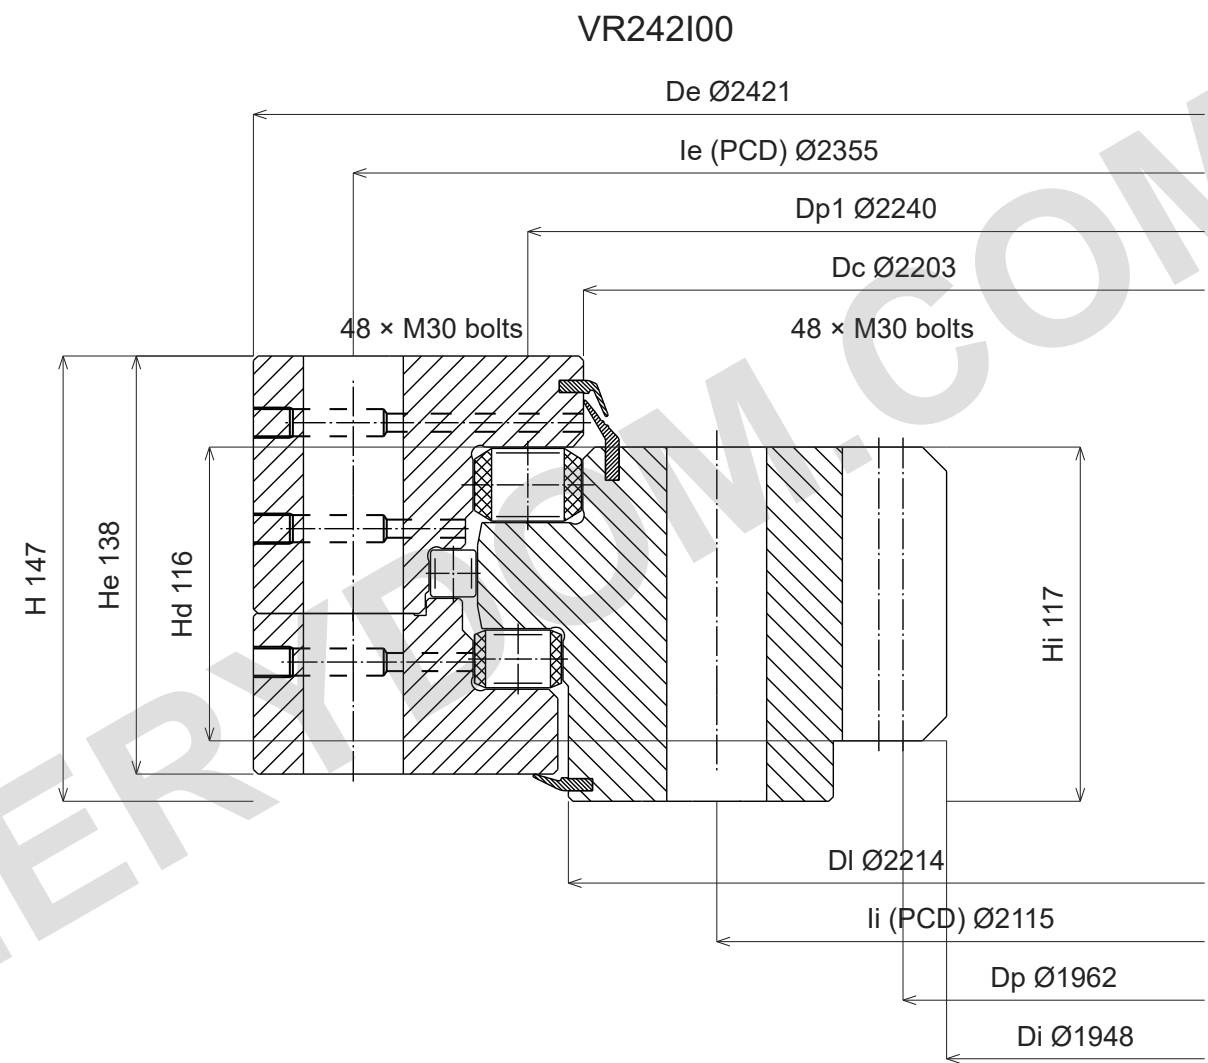

m 18; Z 109; xm -10; km -2

LOAD CAPACITY

La Leonessa VR242I00 — Load capacity curve

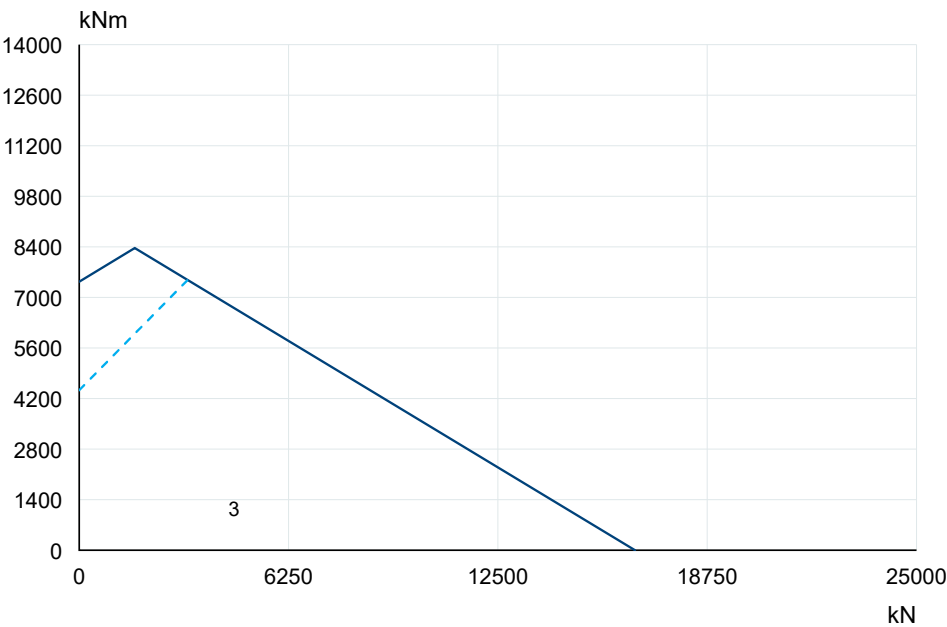

VR242I00 · source VRI-25 curve 3 · PDF p10

Axial compression force [kN]

Tilting moment [kNm] · original chart scale

Torque-wrenched class 10.9 bolts

VR242I00 uses source curve 3.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.
Source: La Leonessa Three Row 2019 / VRI-25; dimensions p8/9; load chart p10, curve 3; catalogue model VR242I00.
H 147; Hd 116; m 18; Z 109; De/Di 2421/1948; Hi/He 117/138; Dc/DI/Dp1 2203/2214/2240; le/li (PCD) 2355/2115.
La Leonessa VR242I00 — Product page | MERYDOM

MERYDOM
Three-row roller
VR242I00
REFERENCE: La Leonessa / VRI-25
mm · NTS · REV B32-1 · SHEET 1/1