



BEARING SECTION

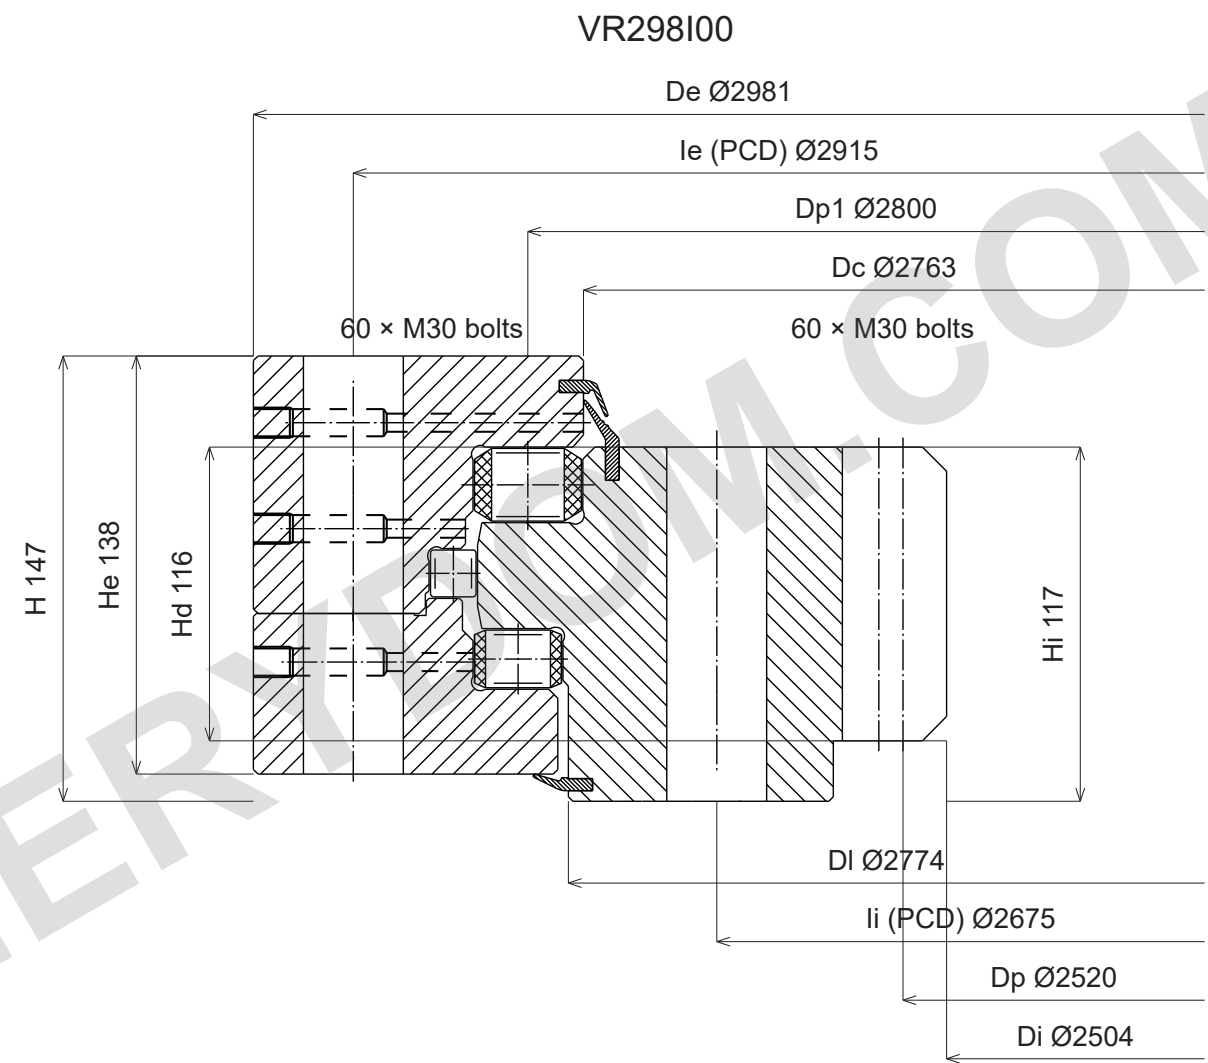

m 20; Z 126; xm -10; km -2

LOAD CAPACITY

La Leonessa VR298I00 — Load capacity curve

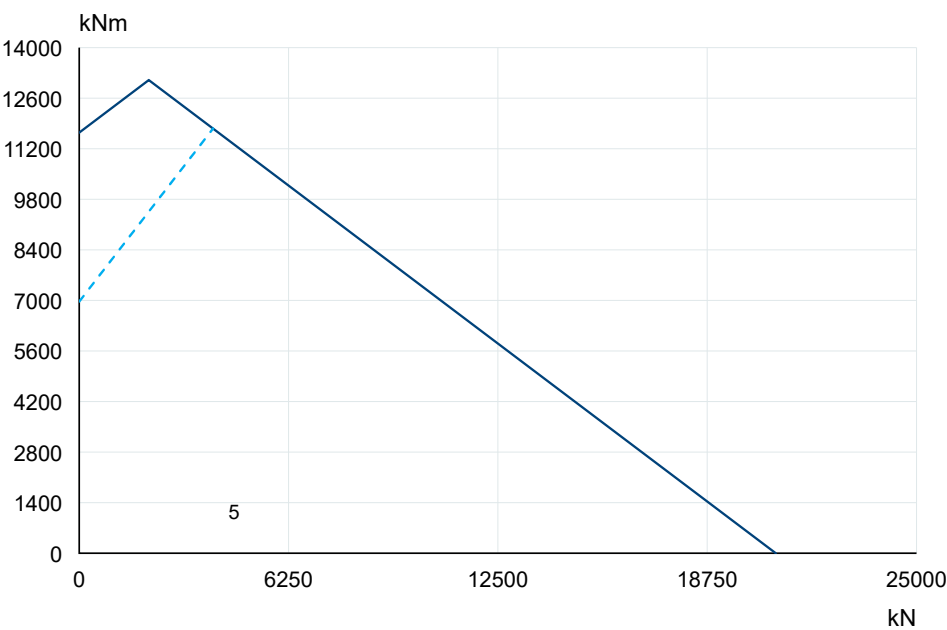

VR298I00 · source VRI-25 curve 5 · PDF p10

Axial compression force [kN]

Tilting moment [kNm] · original chart scale

Torque-wrenched class 10.9 bolts

VR298I00 uses source curve 5.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.
Source: La Leonessa Three Row 2019 / VRI-25; dimensions p8/9; load chart p10, curve 5; catalogue model VR298I00.
H 147; Hd 116; m 20; Z 126; De/Di 2981/2504; Hi/He 117/138; Dc/DI/Dp1 2763/2774/2800; le/li (PCD) 2915/2675.
La Leonessa VR298I00 — Product page | MERYDOM

MERYDOM
Three-row roller
VR298I00
REFERENCE: La Leonessa / VRI-25
mm · NTS · REV B32-1 · SHEET 1/1