
BEARING SECTION

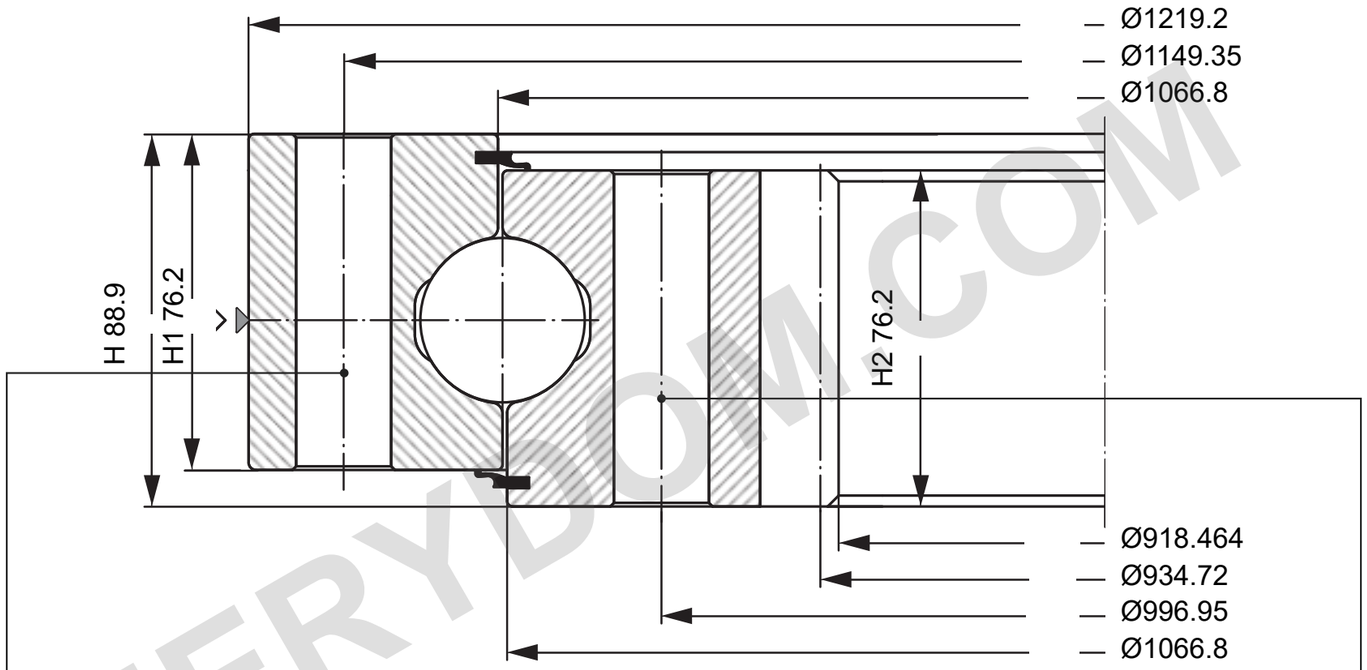


32 × Ø21*; PCD Ø1149.35; bolt 3/4-10 UNC

36 × Ø21*; PCD Ø996.95; bolt 3/4-10 UNC

Tooth width b 76.2 mm; DP 2.5 1/in; z -92 (internal)

* Illustrative through-hole diameter; subject to customer confirmation

LOAD CAPACITY

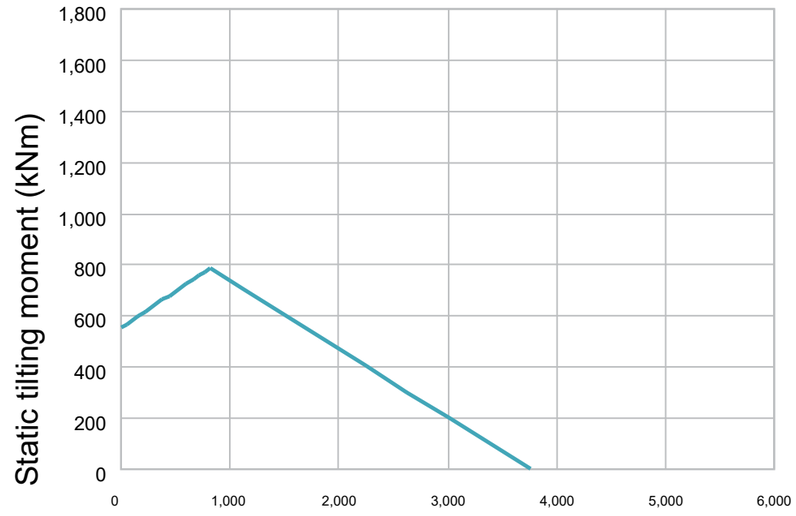

Liebherr KUD01067-025VJ15-900-000

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: Liebherr Slewing Bearings 2018; dimensions p85; load chart p85.

Ø1219.2; Ø918.464; H 88.9; H1 76.2; H2 76.2; Ø1149.35; Ø996.95 mm.

Liebherr KUD01067-025VJ15-900-000 — Product page | MERYDOM

MERYDOM
Single-row four-point contact ball
KUD01067-025VJ15-900-000
REFERENCE: Liebherr / KUD_25_VJ
REV 1 | NTS | mm | Sheet 1/1

MERYDOM.COM