
BEARING SECTION

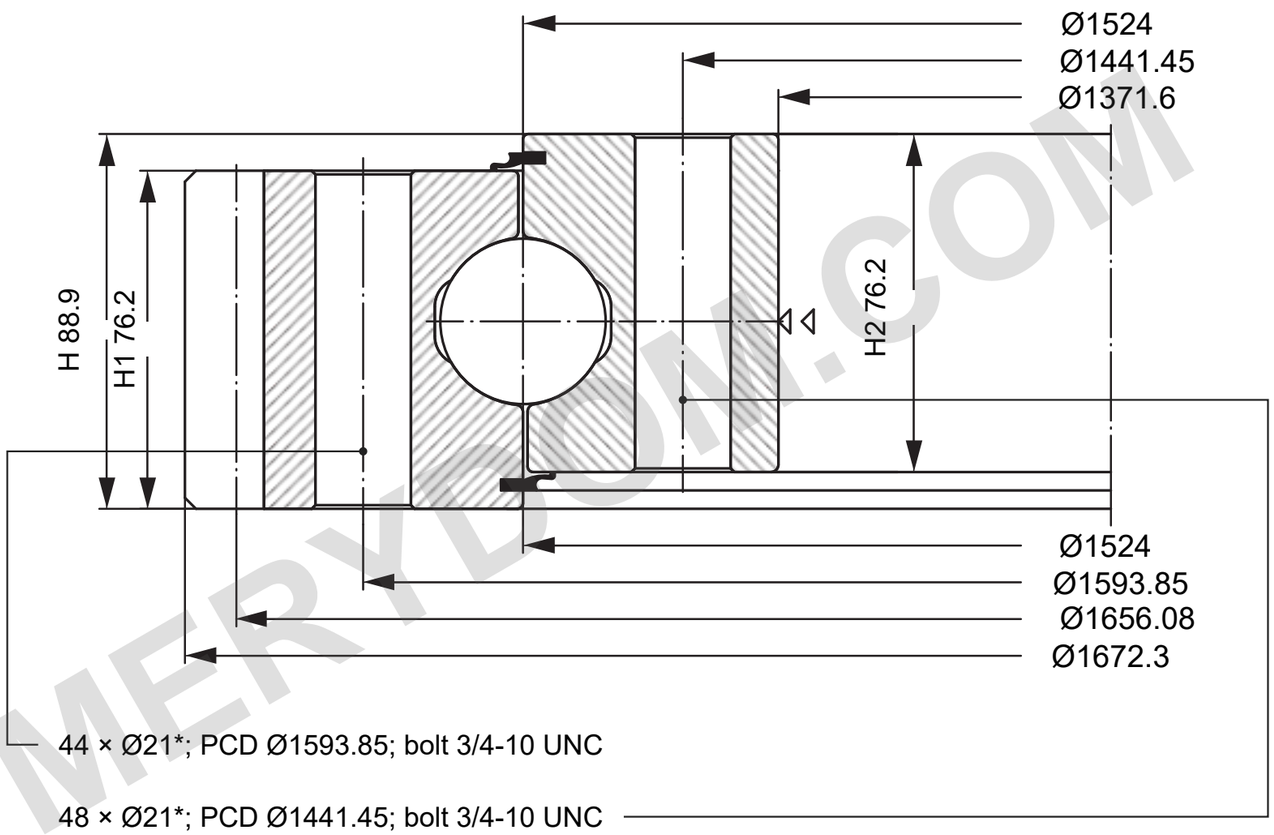


44 × Ø21*; PCD Ø1593.85; bolt 3/4-10 UNC

48 × Ø21*; PCD Ø1441.45; bolt 3/4-10 UNC

Tooth width b 76.2 mm; DP 2.5 1/in; z 163

* Illustrative through-hole diameter; subject to customer confirmation

LOAD CAPACITY

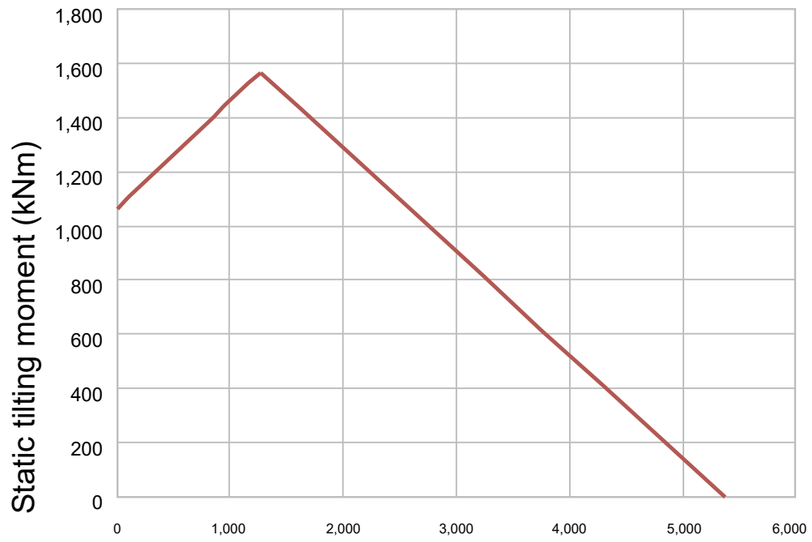

Static axial load (kN)

Liebherr KUD01524-025VA15-900-000

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: Liebherr Slewing Bearings 2018; dimensions p77; load chart p77.

Ø1672.3; Ø1371.6; H 88.9; H1 76.2; H2 76.2; Ø1593.85; Ø1441.45 mm.

Liebherr KUD01524-025VA15-900-000 — Product page | MERYDOM

MERYDOM
Single-row four-point contact ball
KUD01524-025VA15-900-000
REFERENCE: Liebherr / KUD_25_VA
REV 1 | NTS | mm | Sheet 1/1

MERYDOM.COM