
BEARING SECTION

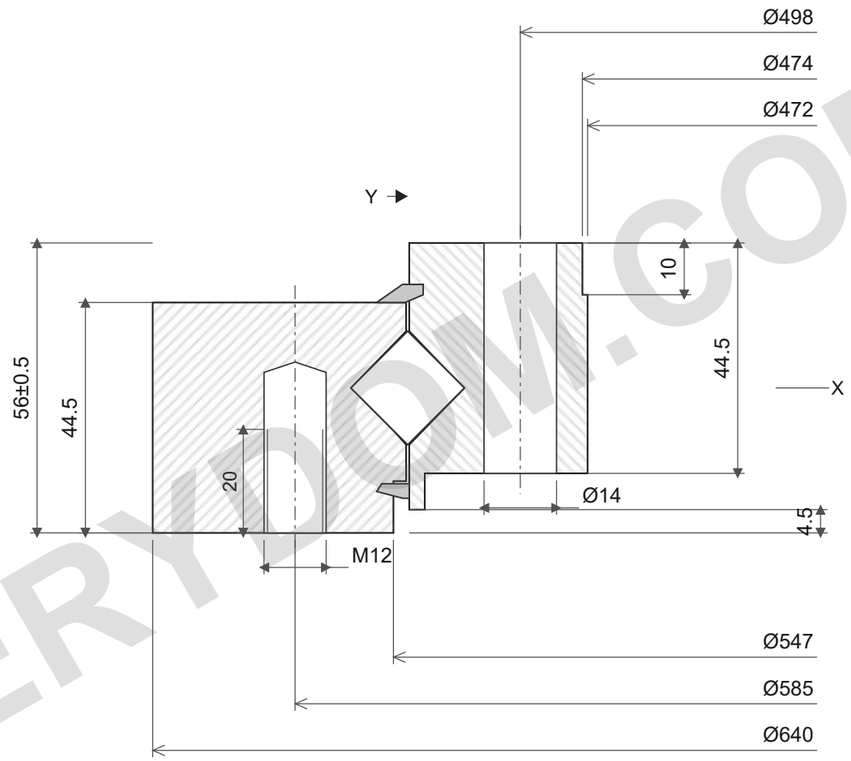


ARO BE 40 µm
ARO BI 40 µm
RRO BE 70 µm
RRO BI 60 µm

28×M12 / 32×Ø14
m6; z105

LOAD CAPACITY

ROLLIX 46-0544-00

Catalogue limits; supported loads, class10.9.

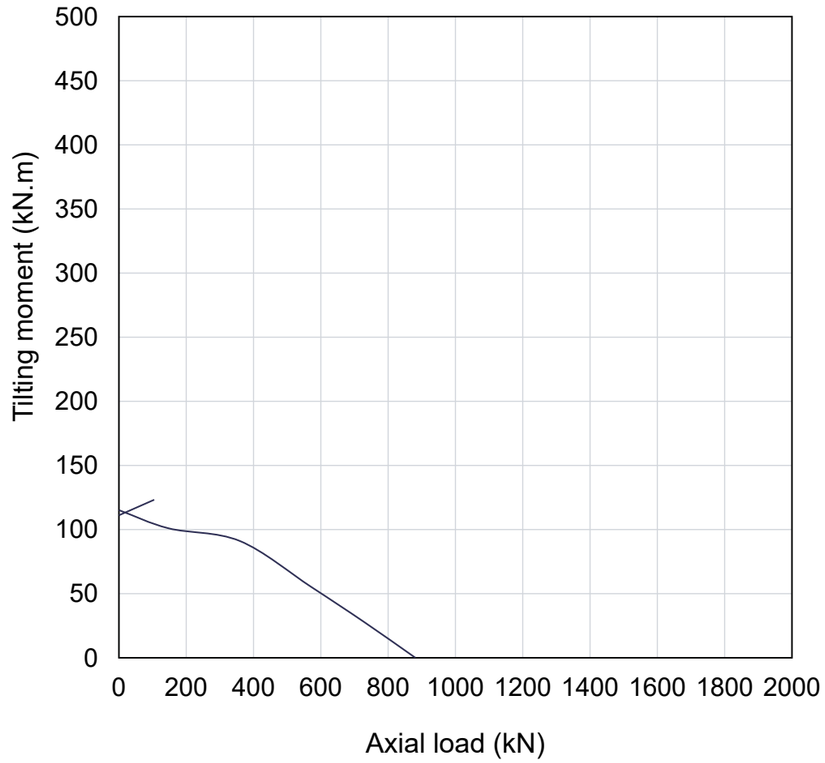

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p120; load chart p120.

640; 472; 56±0.5; 44.5; 44.5; 585; 28; 498; 32; 547; 474; 28×M12 depth20; 32×Ø14 Th; ARO BE/BI 40/40 µm; RRO BE/BI 70/60 µm; m6; z105

ROLLIX 46-0544-00 — Product page | MERYDOM

MERYDOM
Single row crossed roller slewing bearing
46-0544-00
REFERENCE: ROLLIX /46
Rev3.0 | mm | NTS | 1/1

MERYDOM.COM