
BEARING SECTION

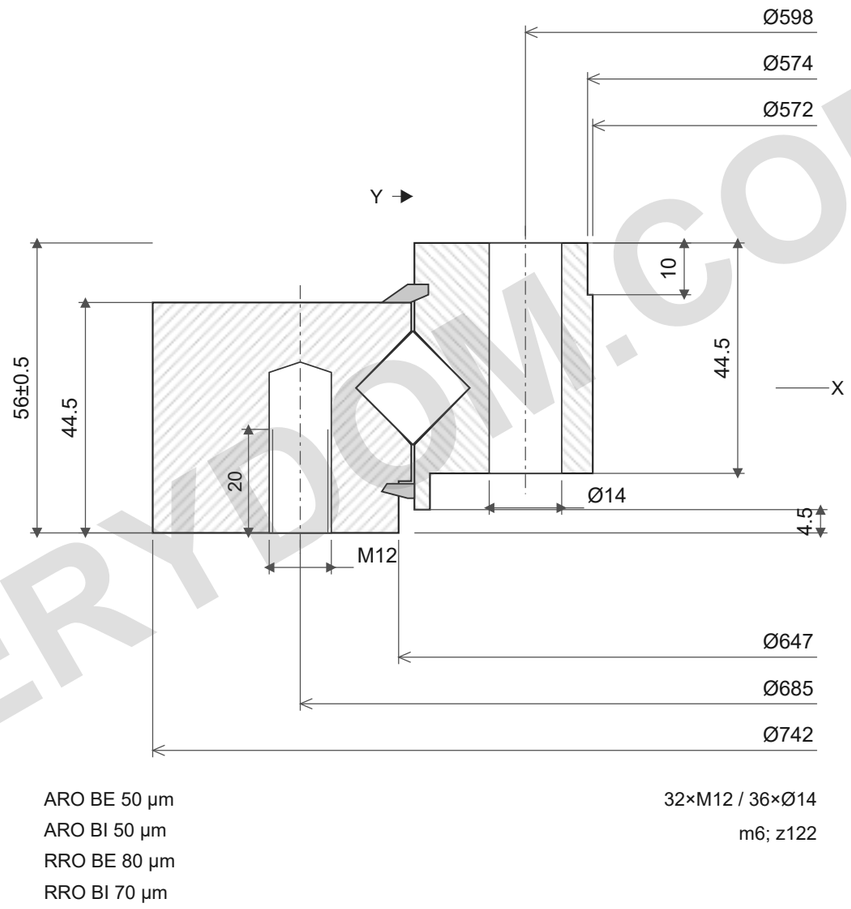


ARO BE 50 µm
ARO BI 50 µm
RRO BE 80 µm
RRO BI 70 µm

32×M12 / 36×Ø14
m6; z122

LOAD CAPACITY

ROLLIX 46-0644-00

Catalogue limits; supported loads, class10.9.

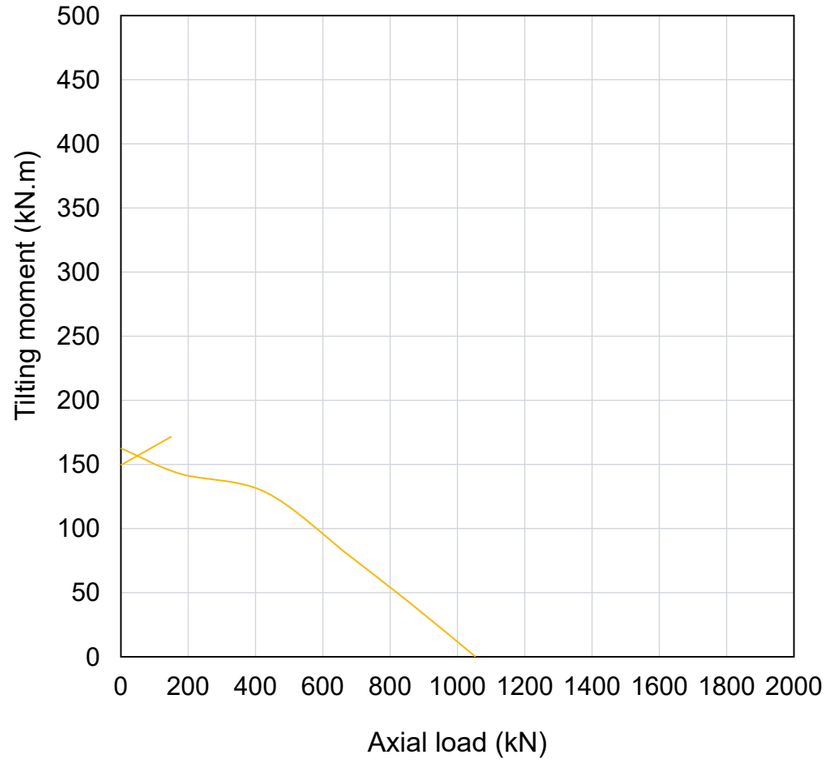

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p120; load chart p120.

742; 572; 56±0.5; 44.5; 44.5; 685; 32; 598; 36; 647; 574; 32×M12 depth20; 36×Ø14 Th; ARO BE/BI 50/50 µm; RRO BE/BI 80/70 µm; m6; z122

ROLLIX 46-0644-00 — Product page | MERYDOM

MERYDOM
Single row crossed roller slewing bearing
46-0644-00
REFERENCE: ROLLIX /46
Rev3.0 | mm | NTS | 1/1

MERYDOM.COM