
BEARING SECTION

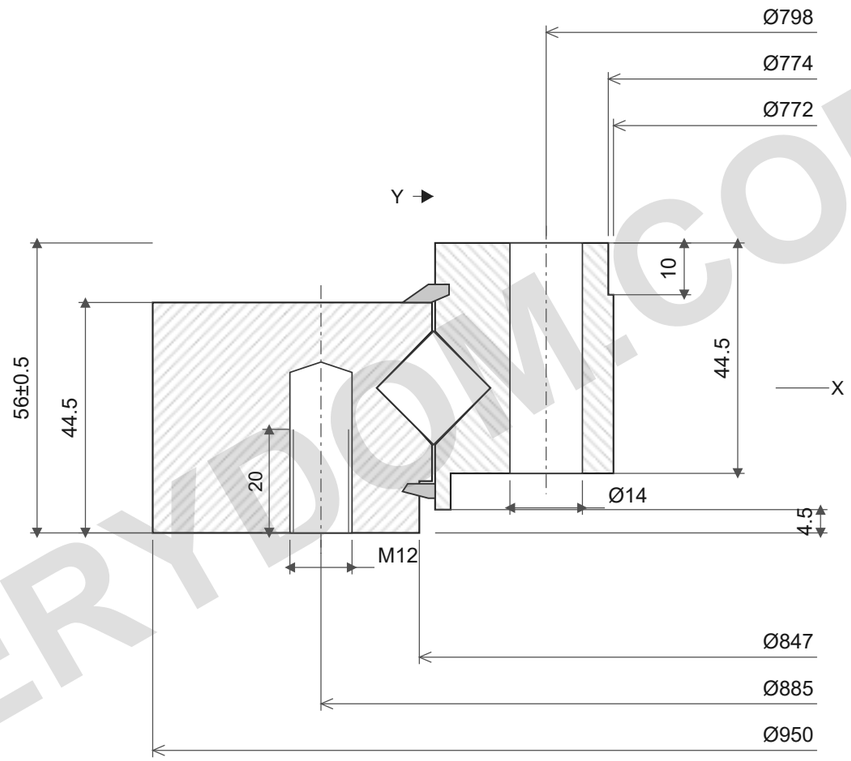


ARO BE 50 µm
ARO BI 50 µm
RRO BE 90 µm
RRO BI 80 µm

36×M12 / 40×Ø14
m8; z117

LOAD CAPACITY

ROLLIX 46-0844-00

Catalogue limits; supported loads, class10.9.

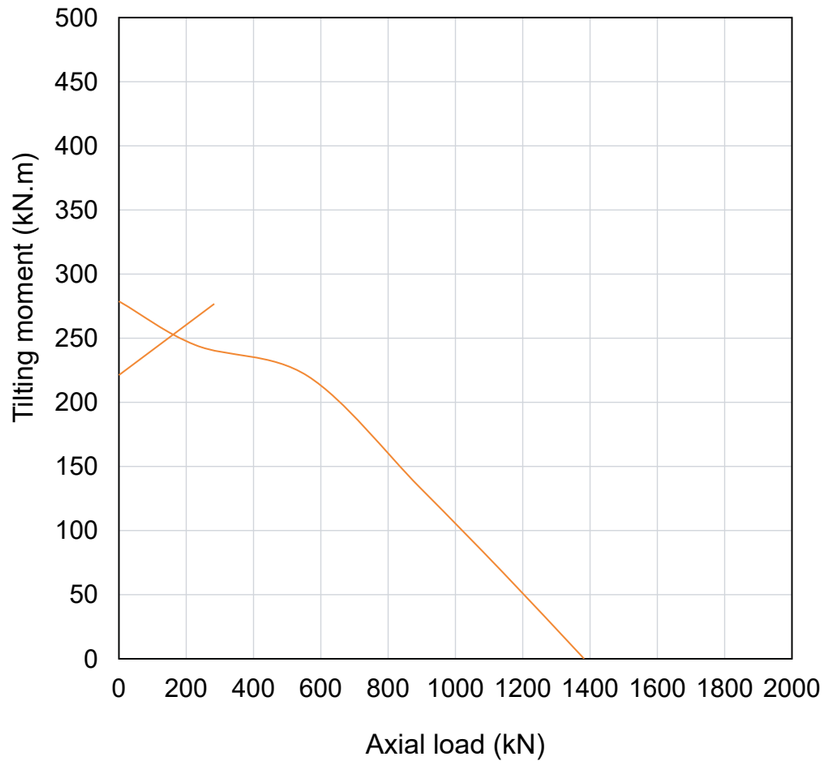

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p120; load chart p120.

950; 772; 56±0.5; 44.5; 44.5; 885; 36; 798; 40; 847; 774; 36×M12 depth20; 40×Ø14 Th; ARO BE/BI 50/50 µm; RRO BE/BI 90/80 µm; m8; z117

ROLLIX 46-0844-00 — Product page | MERYDOM

MERYDOM
Single row crossed roller slewing bearing
46-0844-00
REFERENCE: ROLLIX /46
Rev3.0 | mm | NTS | 1/1

MERYDOM.COM