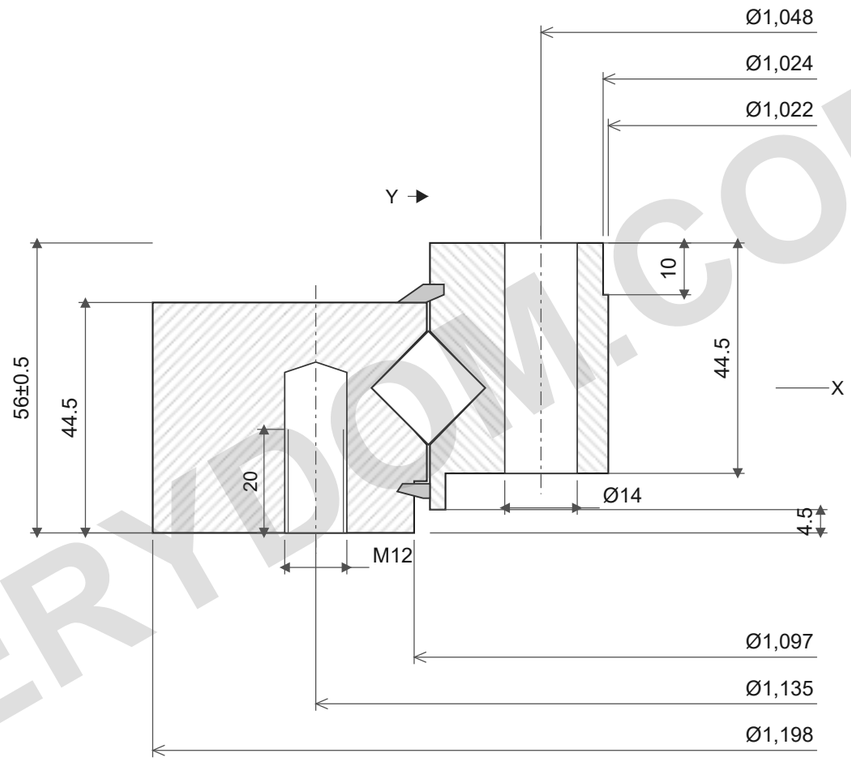
## BEARING SECTION



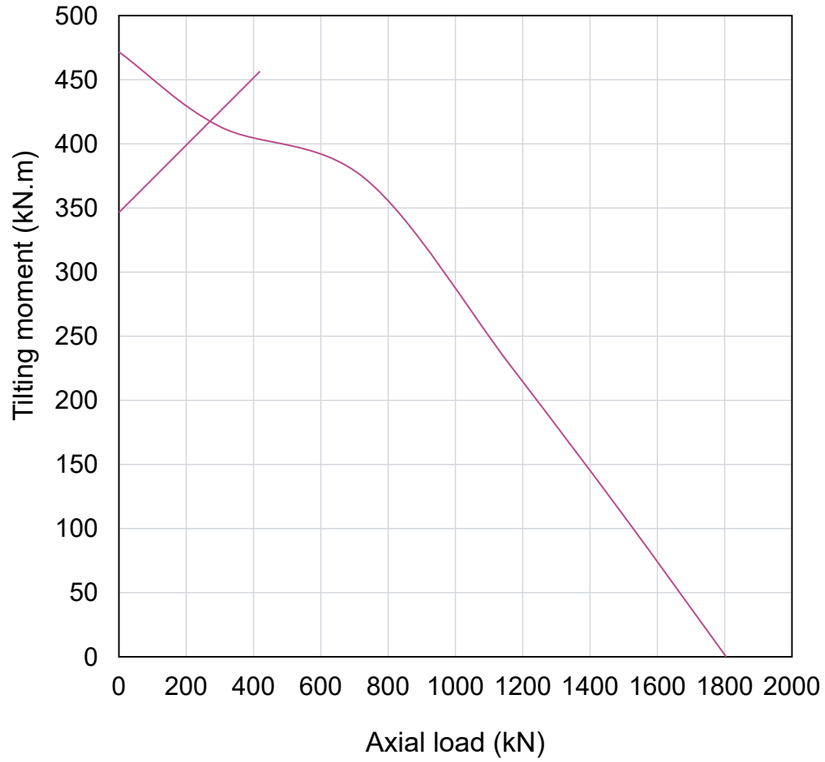

ARO BE 70 µm
ARO BI 70 µm
RRO BE 110 µm
RRO BI 110 µm

44×M12 / 48×Ø14
m8; z148

## LOAD CAPACITY

ROLLIX 46-1094-00

Catalogue limits; supported loads, class10.9.




## REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p120; load chart p120.

1,198; 1,022; 56±0.5; 44.5; 44.5; 1,135; 44; 1,048; 48; 1,097; 1,024; 44×M12 depth20; 48×Ø14 Th; ARO BE/BI 70/70 µm; RRO BE/BI 110/110 µm; m8; z148

ROLLIX 46-1094-00 — Product page | MERYDOM

| MERYDOM |
| --- |
| Single row crossed roller slewing bearing |
| **46-1094-00** |
| REFERENCE: ROLLIX /46 |
| Rev3.0 \| mm \| NTS \| 1/1 |

MERYDOM.COM