
BEARING SECTION

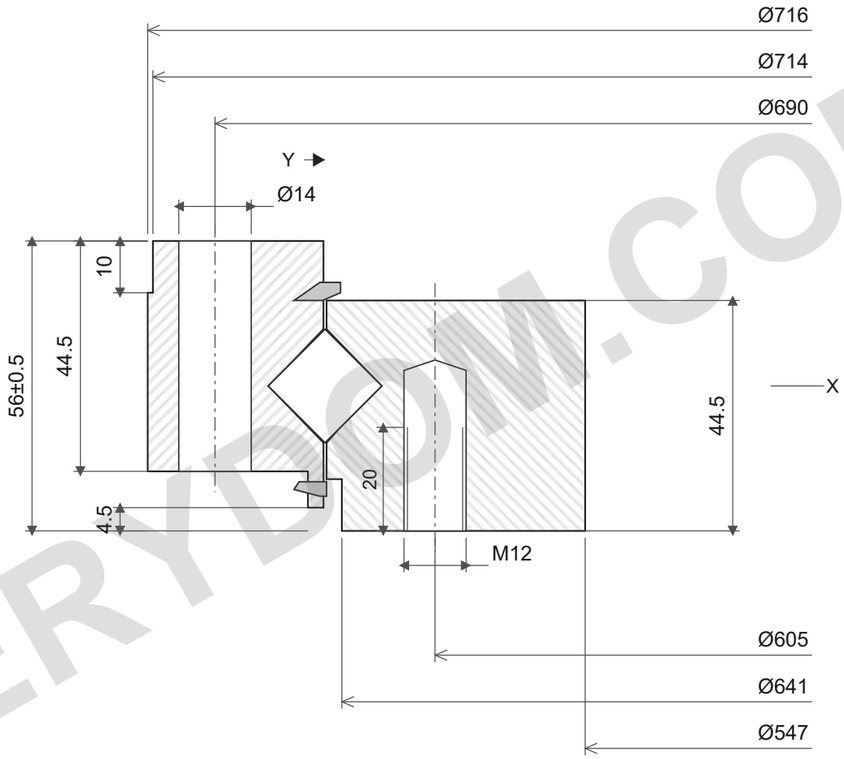


ARO BE 50 µm
ARO BI 50 µm
RRO BE 80 µm
RRO BI 70 µm

36×Ø14 / 36×M12
m6; z93

LOAD CAPACITY

ROLLIX 47-0644-00

Catalogue limits; supported loads, class10.9.

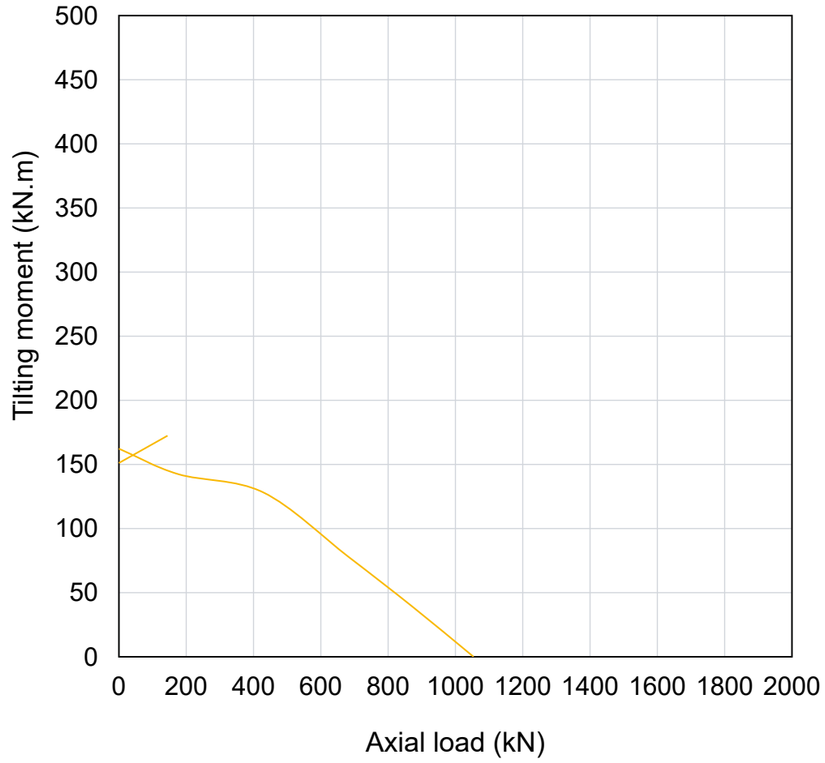

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p121; load chart p121.

716; 547; 56±0.5; 44.5; 44.5; 690; 36; 605; 36; 714; 641; 36×Ø14 Th; 36×M12 depth20; ARO BE/BI 50/50 µm; RRO BE/BI 80/70 µm; m6; z93

ROLLIX 47-0644-00 — Product page | MERYDOM

MERYDOM
Single row crossed roller slewing bearing
47-0644-00
REFERENCE: ROLLIX /47
Rev3.0 | mm | NTS | 1/1

MERYDOM.COM