
BEARING SECTION

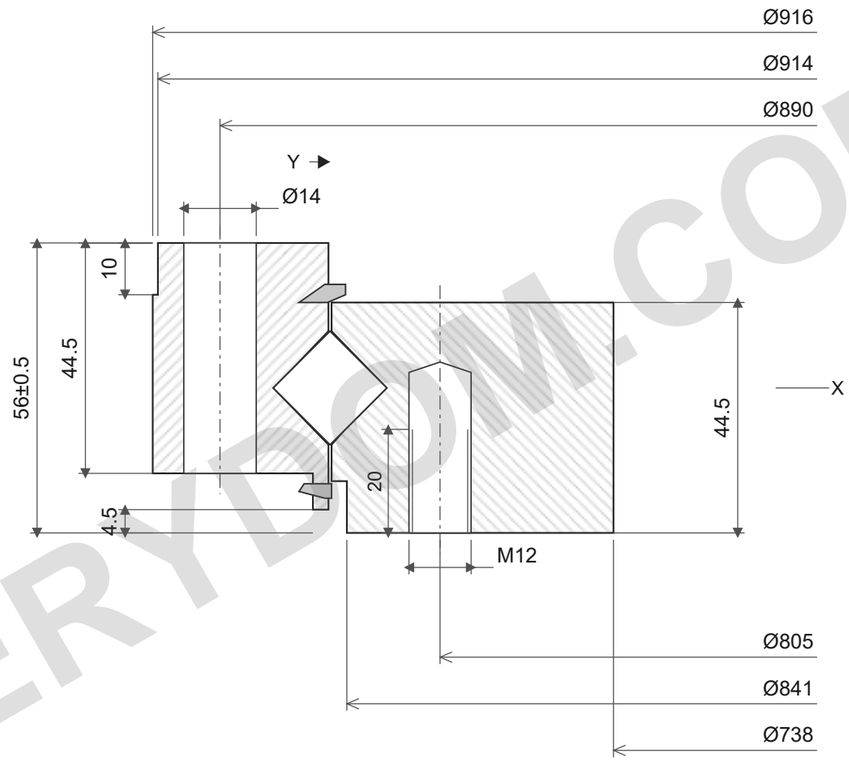


ARO BE 50 µm
ARO BI 50 µm
RRO BE 90 µm
RRO BI 80 µm

40×Ø14 / 40×M12
m8; z94

LOAD CAPACITY

ROLLIX 47-0844-00

Catalogue limits; supported loads, class10.9.

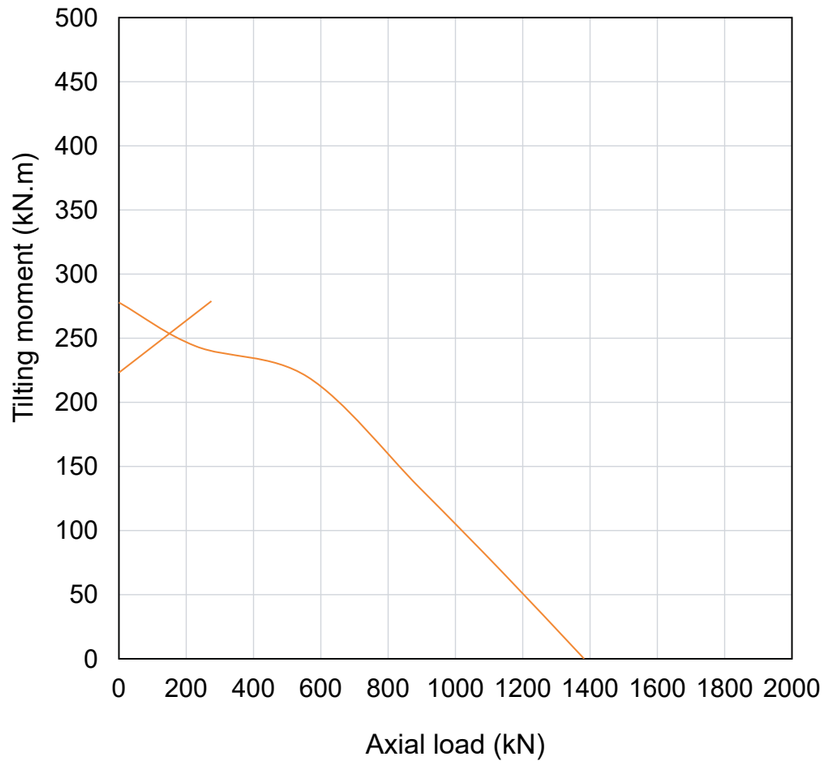

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p121; load chart p121.

916; 738; 56±0.5; 44.5; 44.5; 890; 40; 805; 40; 914; 841; 40×Ø14 Th; 40×M12 depth20; ARO BE/BI 50/50 µm; RRO BE/BI 90/80 µm; m8; z94

ROLLIX 47-0844-00 — Product page | MERYDOM

MERYDOM
Single row crossed roller slewing bearing
47-0844-00
REFERENCE: ROLLIX /47
Rev3.0 | mm | NTS | 1/1

MERYDOM.COM