
BEARING SECTION

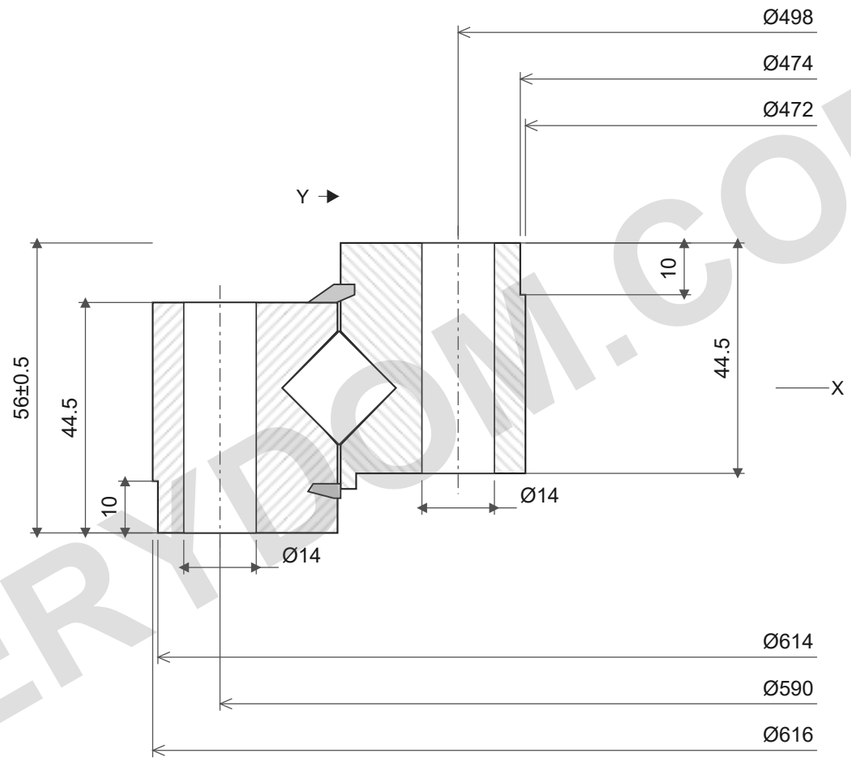


ARO BE 40 µm
ARO BI 40 µm
RRO BE 70 µm
RRO BI 70 µm

32×Ø14 / 32×Ø14

LOAD CAPACITY

ROLLIX 48-0544-00

Catalogue limits; supported loads, class10.9.

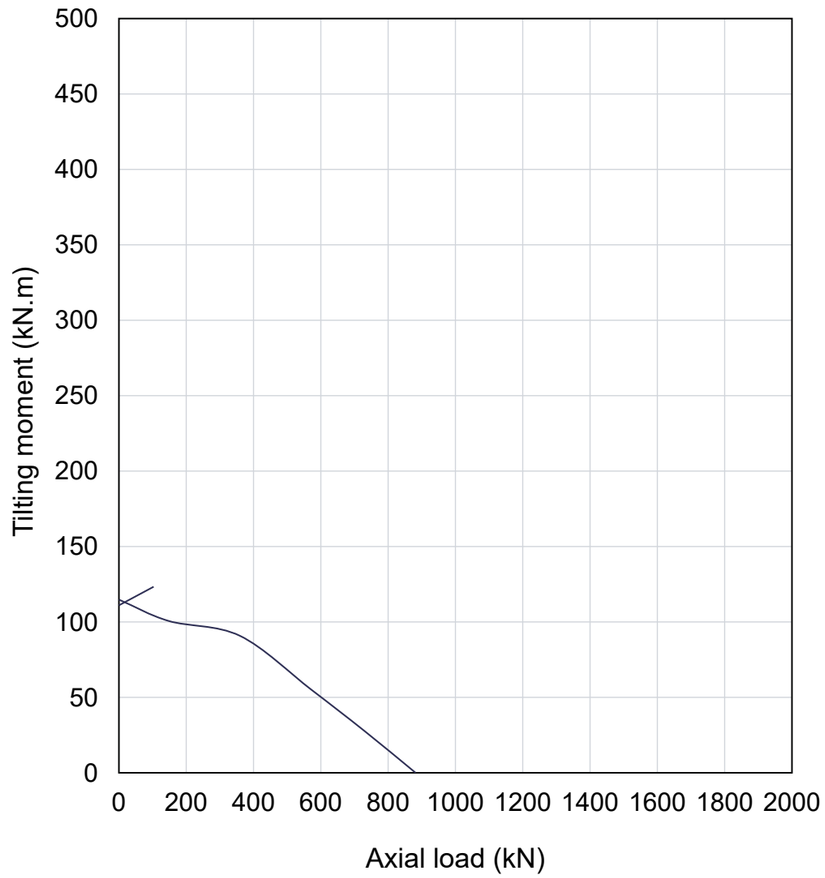

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p122; load chart p122.

616; 472; 56±0.5; 44.5; 44.5; 590; 32; 498; 32; 614; 474; 32×Ø14 Th; 32×Ø14 Th; ARO BE/BI 40/40 µm; RRO BE/BI 70/70 µm

ROLLIX 48-0544-00 — Product page | MERYDOM

MERYDOM
Single row crossed roller slewing bearing
48-0544-00
REFERENCE: ROLLIX /48
Rev3.0 | mm | NTS | 1/1

MERYDOM.COM