
BEARING SECTION

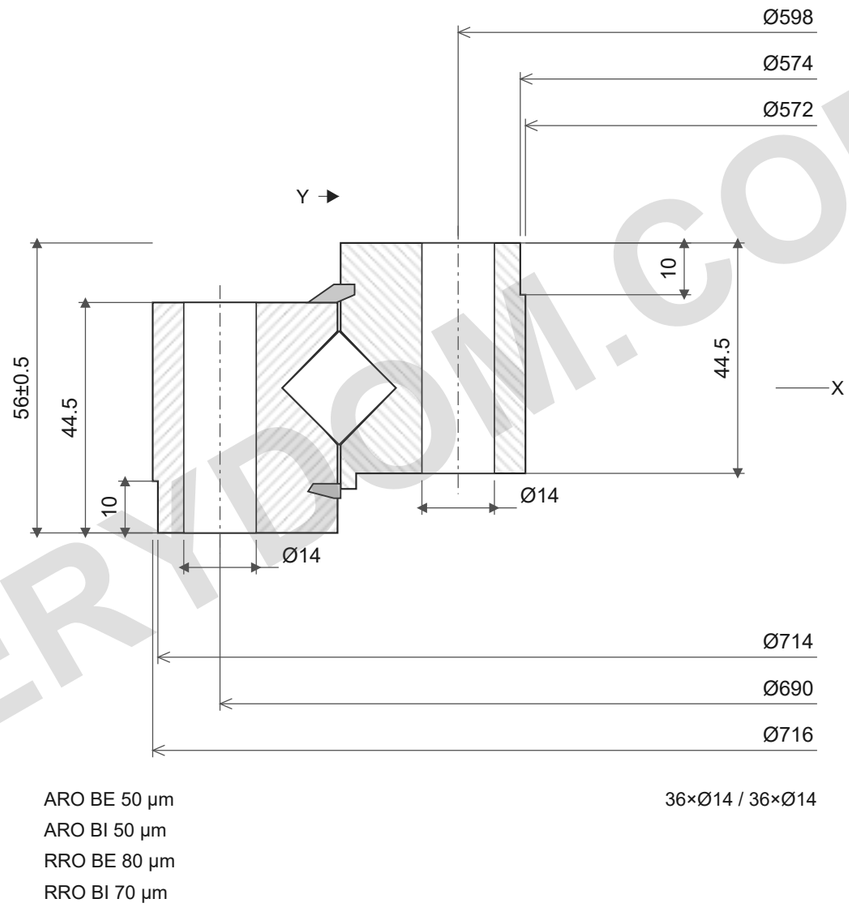


ARO BE 50 µm
ARO BI 50 µm
RRO BE 80 µm
RRO BI 70 µm

36×Ø14 / 36×Ø14

LOAD CAPACITY

ROLLIX 48-0644-00

Catalogue limits; supported loads, class10.9.

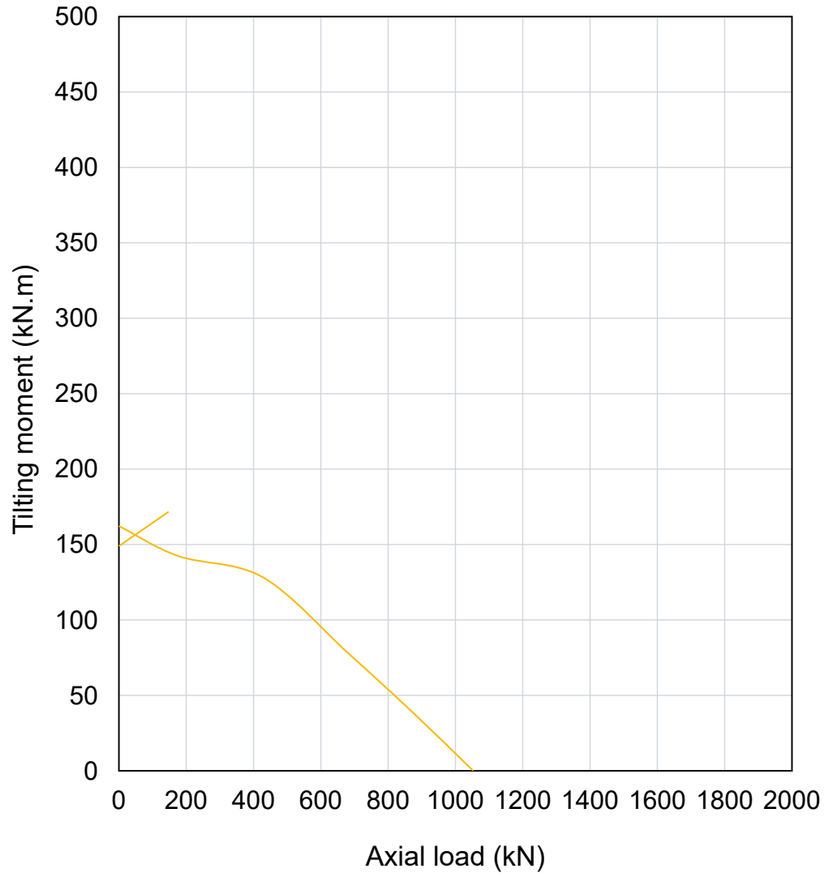

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: ROLLIX July2024; dimensions p122; load chart p122.

716; 572; 56±0.5; 44.5; 44.5; 690; 36; 598; 36; 714; 574; 36×Ø14 Th; 36×Ø14 Th; ARO BE/BI 50/50 µm; RRO BE/BI 80/70 µm

ROLLIX 48-0644-00 — Product page | MERYDOM

MERYDOM
Single row crossed roller slewing bearing
48-0644-00
REFERENCE: ROLLIX /48
Rev3.0 | mm | NTS | 1/1

MERYDOM.COM