

BEARING SECTION

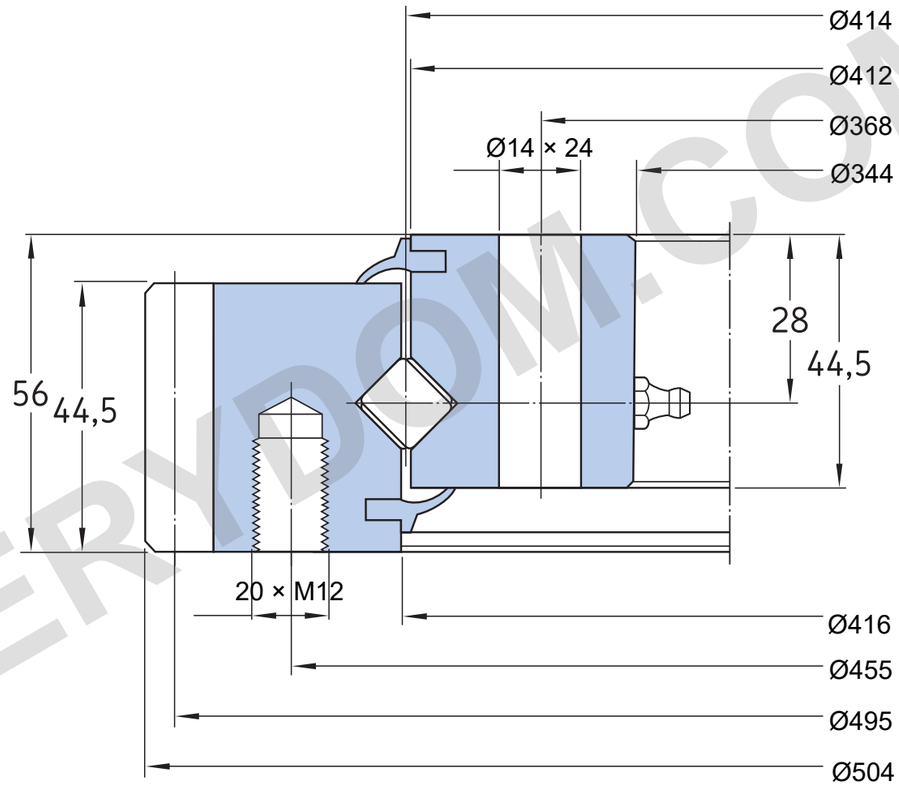

LOAD CAPACITY

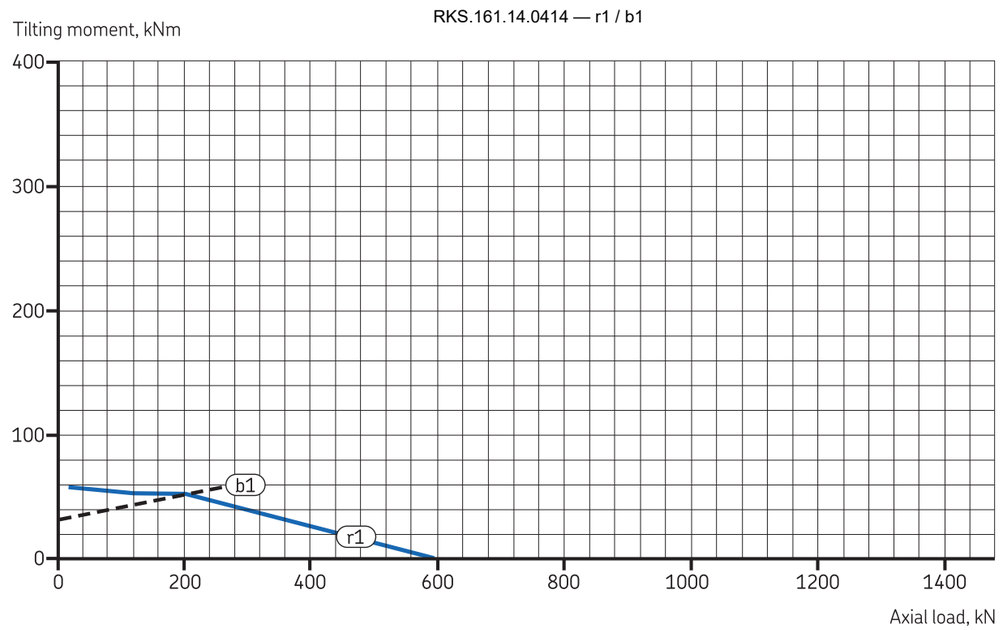

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

SKF pp. 92/93; supported; r1 raceway / b1 bolts 10.9; conditions p. 21

roller Ø14; outer holes 20 × M12; inner holes Ø14 × 24; 4 equal inner grease fittings A M10×1, DIN 71412

SKF RKS.161.14.0414 — Product page | MERYDOM

MERYDOM
Crossed cylindrical roller
RKS.161.14.0414
SKF / RKS.161
REV 1 | NTS | mm | Sheet 1/1

MERYDOM.COM