

BEARING SECTION

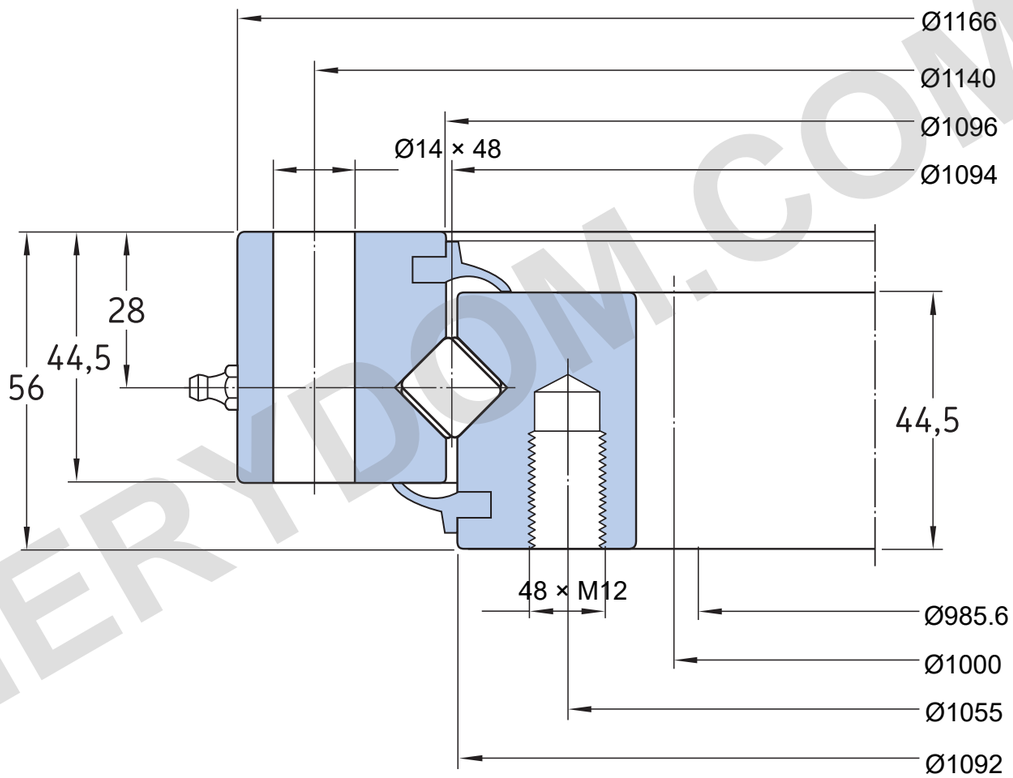

LOAD CAPACITY

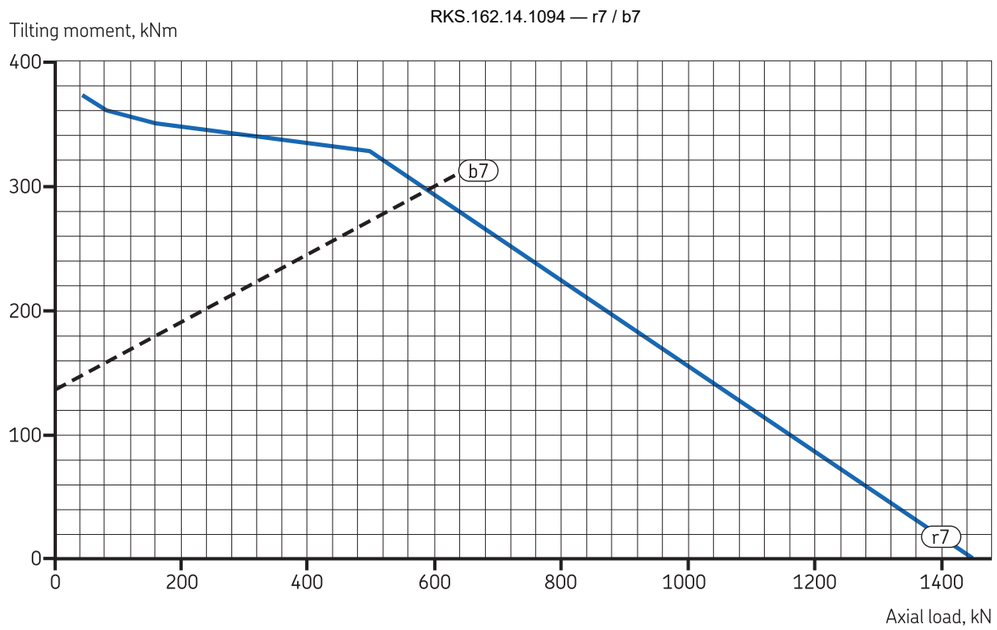

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

SKF pp. 96/97; supported; r7 raceway / b7 bolts 10.9; conditions p. 21

roller Ø14; outer holes Ø14 × 48; inner holes 48 × M12; 4 equal outer grease fittings A M10×1, DIN 71412

SKF RKS.162.14.1094 — Product page | MERYDOM

MERYDOM
Crossed cylindrical roller
RKS.162.14.1094
SKF / RKS.162
REV 1 | NTS | mm | Sheet 1/1

MERYDOM.COM