

BEARING SECTION

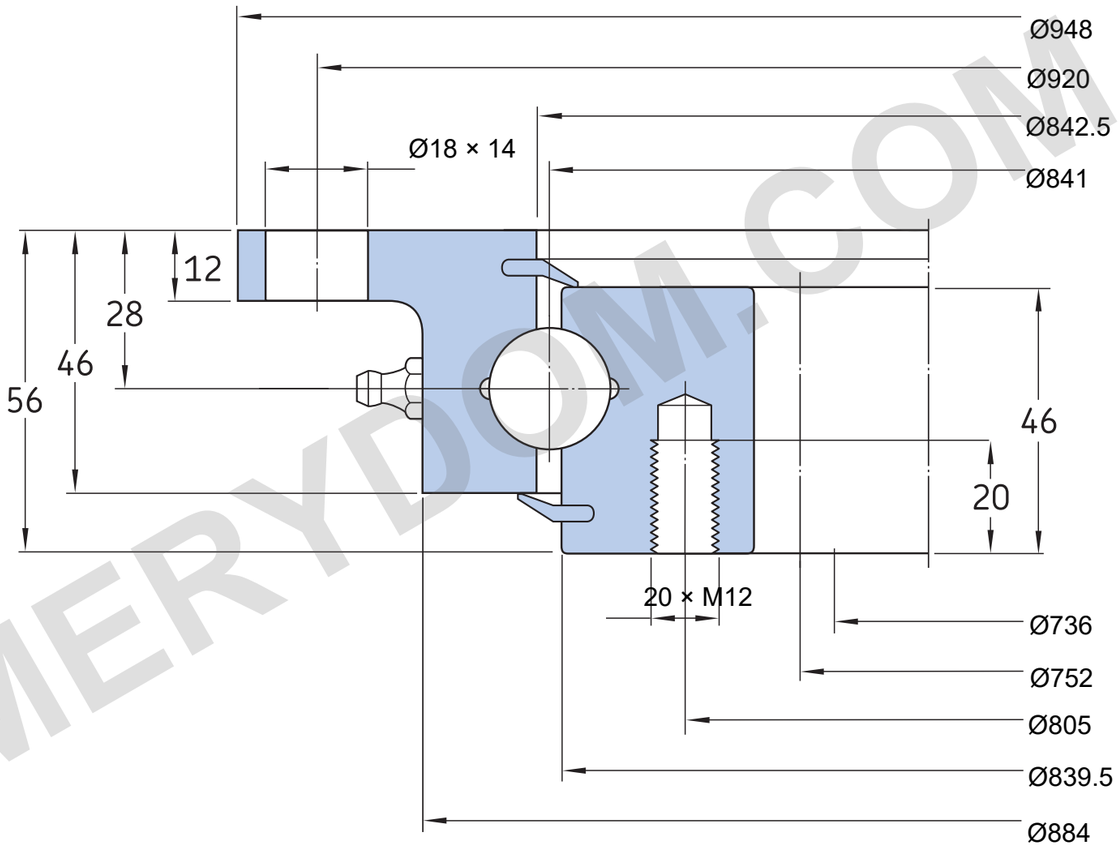

LOAD CAPACITY

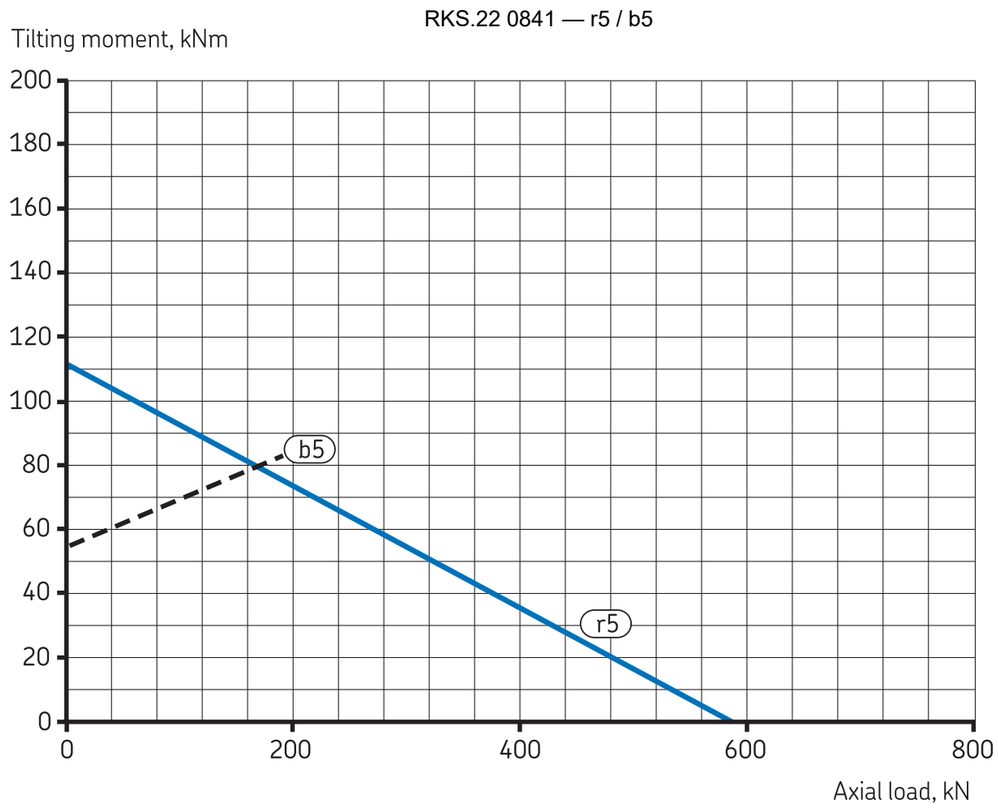

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

SKF pp. 64/65; supported; r5 raceway / b5 bolts 10.9; conditions p. 21

outer holes 14; inner M12 holes 20; 4 equal outer grease fittings A M8×1, DIN 71412

SKF RKS.22 0841 — Product page | MERYDOM

MERYDOM
Four-point contact ball
RKS.22 0841
SKF / RKS.22
REV 1 | NTS | mm | Sheet 1/1

MERYDOM.COM